




# STRAIN RELIEF BUSHINGS


- Designed to insulate and protect cables and cords
- Provide non-slip grip and will not injure insulation of AC cord
- Material: Polyamide 6,6, UL94V-2
- Color: Black

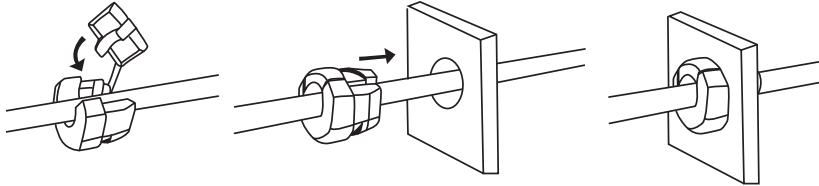

Maximum chassis thickness-part actually has additional clearance



chassis dimensions



3W-1



Part No.	Cross Section Shape	Accommodated Wires		Mounting Holes		Max. Chassis Thickness T mm (inch)	Length L mm (inch)
		UL Wires	Approx. Wires Size mm (inch)	H mm (inch)	W mm (inch)		
2B-2	Flat	SPT-1 18/2	2.8x5.6 (0.11x0.22)	9.5 (0.37)	8.7 (0.34)	3.4 (0.13)	10.5 (0.41)
3B-1		SPT-1 18/2	3.1x5.6 (0.12x0.22)	10.3 (0.41)	12.3 (0.48)	1.6 (0.06)	10.3 (0.41)
3B-2		SPT-1 18/2	3.1x5.6 (0.12x0.22)	10.3 (0.41)	12.3 (0.48)	2.7 (0.11)	10.3 (0.41)
3W-1		SPT-2 18/3	3.8x10.2 (0.15x0.40)	9.5 (0.37)	16.0 (0.63)	2.4 (0.09)	11.9 (0.47)
4B-2		SPT-1 18/2	3.1x5.6 (0.12x0.22)	12.7 (0.50)	11.3 (0.44)	2.6 (0.10)	11.0 (0.43)
4L-2		SPT-2 18/2	3.1x7.6 (0.12x0.30)	12.7 (0.50)	11.5 (0.45)	2.6 (0.10)	10.5 (0.41)
4W-2		SPT-2 18/2	3.8x7.1 (0.15x0.28)	12.7 (0.50)	11.9 (0.47)	1.6 (0.06)	10.8 (0.43)
5B-2		Round	SVT 18/3	ø6.4~7.4 (0.25x0.29)	11.2 (0.44)	14.5 (0.57)	2.6 (0.10)
5W-2	AWM 24 64 22/12		ø6.4~7.4 (0.25x0.29)	12.5 (0.49)	11.5 (0.45)	1.6 (0.06)	11.1 (0.44)
6B3-2R	SJT 18/3		ø8.3~9.2 (0.32x0.36)	16.1 (0.63)	14.0 (0.55)	3.2 (0.13)	14.9 (0.59)
6B3-2S	SJT 18/3		ø8.3~9.2 (0.32x0.36)	16.1 (0.63)	14.0 (0.55)	2.8 (0.11)	15.2 (0.60)
6W3-4R	SJT 18/3		ø8.3~9.2 (0.32x0.36)	16.1 (0.63)	14.0 (0.55)	1.6 (0.06)	14.7 (0.58)
6W3-4S	SJT 18/3		ø8.3~9.2 (0.32x0.36)	16.1 (0.63)	14.0 (0.55)	1.6 (0.06)	14.7 (0.58)
7H-2	SJT 14/3		ø9.2~11.0 (0.36x0.43)	16.8 (0.66)	15.7 (0.62)	1.8 (0.07)	19.1 (0.75)
8H-2	SJT 12/3		ø13.5~15.3 (0.53x0.60)	21.1 (0.83)	19.5 (0.77)	3.5 (0.14)	20.7 (0.81)
9H-2	#18 20~30PCS		ø11.0~15.0 (0.43x0.59)	23.1 (0.91)	22.2 (0.87)	1.8 (0.07)	17.6 (0.69)