


LASHING TIES

- After fastening, insert remaining length of the tie into buckle to enhance tensile strength and avoid tie to slip off
- Typically used for heavy duty applications such as securing conduit or large cable bundles to permanent structures
- Material: Polyamide 6,6, UL94V-2
- Color: All colors are available



Fastening System
Cable Ties

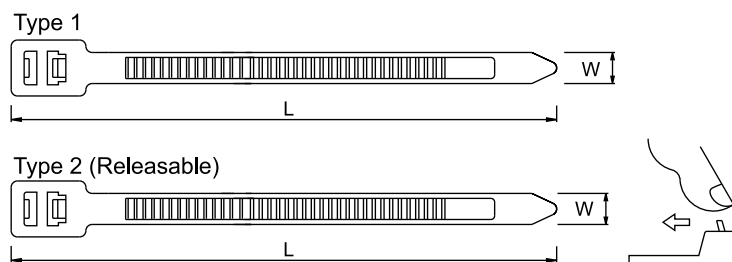

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength		
				N	kgf	lbf
GT-240LT	235 (9.25)	12.6 (0.50)	50 (1.97)	1112	113.4	250
GT-300LT	300 (11.81)	12.6 (0.50)	76 (2.99)	1112	113.4	250
GT-390LT	390 (15.35)	12.6 (0.50)	103 (4.05)	1112	113.4	250
GT-415LT	412 (16.22)	12.6 (0.50)	110 (4.33)	1112	113.4	250
GT-490LT	485 (19.09)	12.6 (0.50)	135 (5.31)	1112	113.4	250
GT-590LT	585 (23.03)	12.6 (0.50)	152 (5.98)	1112	113.4	250
GT-740LT	735 (28.94)	12.6 (0.50)	204 (8.03)	1112	113.4	250
GT-890LT	885 (34.84)	12.6 (0.50)	248 (9.76)	1112	113.4	250
GT-1040LT	1035 (40.75)	12.6 (0.50)	295 (11.61)	1112	113.4	250
Releasable						
GTR-240LT	235 (9.25)	12.6 (0.50)	50 (1.97)	1112	113.4	250
GTR-300LT	300 (11.81)	12.6 (0.50)	76 (2.99)	1112	113.4	250
GTR-390LT	390 (15.35)	12.6 (0.50)	103 (4.05)	1112	113.4	250
GTR-415LT	412 (16.22)	12.6 (0.50)	110 (4.33)	1112	113.4	250
GTR-490LT	485 (19.09)	12.6 (0.50)	135 (5.31)	1112	113.4	250
GTR-590LT	585 (23.03)	12.6 (0.50)	152 (5.98)	1112	113.4	250
GTR-740LT	735 (28.94)	12.6 (0.50)	204 (8.03)	1112	113.4	250
GTR-890LT	885 (34.84)	12.6 (0.50)	248 (9.76)	1112	113.4	250
GTR-1040LT	1035 (40.75)	12.6 (0.50)	295 (11.61)	1112	113.4	250