


# LOW PROFILE CABLE TIES

- Better performance on chemical resistance, mechanical functions under low temperature environment
- Weather resistant cable tie for use in outdoor application
- Material: Polyamide 12, or Polyamide 6,6, weather resistant
- Color: Black



Fastening System  
Cable Ties

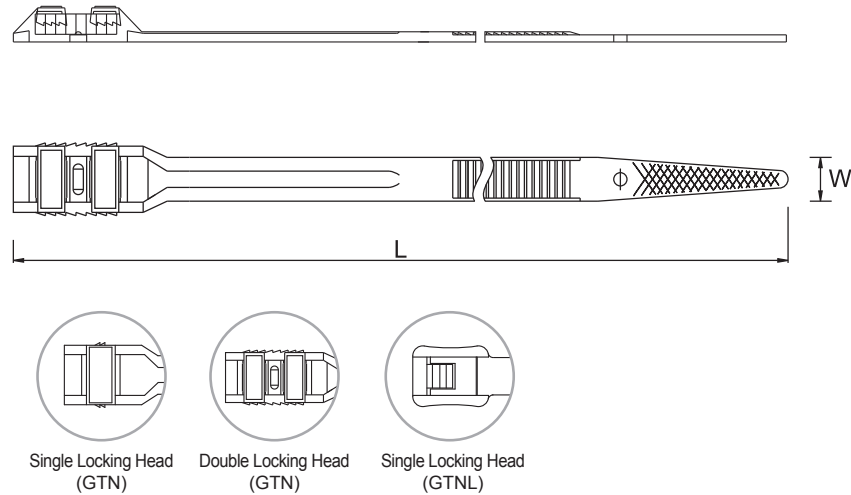

| Part No.     | Material | Length (L)<br>mm (inch) | Width (W)<br>mm (inch) | Max.Bundle ø<br>mm (inch) | Min. Loop Tensile Strength |      |     | Locking Device |        |
|--------------|----------|-------------------------|------------------------|---------------------------|----------------------------|------|-----|----------------|--------|
|              |          |                         |                        |                           | N                          | kgf  | lbf | Single         | Double |
| GTN-180HD    | PA12     | 180 (7.09)              | 8.6 (0.34)             | 40 (1.57)                 | 343                        | 35.0 | 77  | •              |        |
| GTN-260HD    | PA12     | 260 (10.24)             | 8.6 (0.34)             | 53 (2.09)                 | 392                        | 40.0 | 88  |                | •      |
| GTN-360HD    | PA12     | 355 (13.98)             | 8.6 (0.34)             | 83 (3.27)                 | 392                        | 40.0 | 88  |                | •      |
| GTN-115STUV  | PA66 UV  | 114 (4.47)              | 6.2 (0.24)             | 25 (0.98)                 | 294                        | 30.0 | 66  | •              |        |
| GTN-180STUV  | PA66 UV  | 175 (6.89)              | 6.2 (0.24)             | 40 (1.57)                 | 294                        | 30.0 | 66  | •              |        |
| GTN-180HDUV  | PA66 UV  | 180 (7.09)              | 8.6 (0.34)             | 40 (1.57)                 | 343                        | 35.0 | 77  | •              |        |
| GTN-260HDUV  | PA66 UV  | 260 (10.24)             | 8.6 (0.34)             | 53 (2.09)                 | 392                        | 40.0 | 88  |                | •      |
| GTN-360HDUV  | PA66 UV  | 355 (13.98)             | 8.6 (0.34)             | 83 (3.27)                 | 392                        | 40.0 | 88  |                | •      |
| GTN-510HDUV  | PA66 UV  | 515 (20.28)             | 8.9 (0.35)             | 138 (5.43)                | 534                        | 54.5 | 120 |                | •      |
| GTN-750HDUV  | PA66 UV  | 755 (29.72)             | 8.9 (0.35)             | 210 (8.27)                | 534                        | 54.5 | 120 |                | •      |
| GTNL-360HDUV | PA66 UV  | 360 (14.17)             | 8.9 (0.35)             | 100 (3.93)                | 392                        | 40.0 | 88  | •              |        |
| GTNL-500HDUV | PA66 UV  | 482 (18.98)             | 8.9 (0.35)             | 135 (5.31)                | 392                        | 40.0 | 88  | •              |        |