

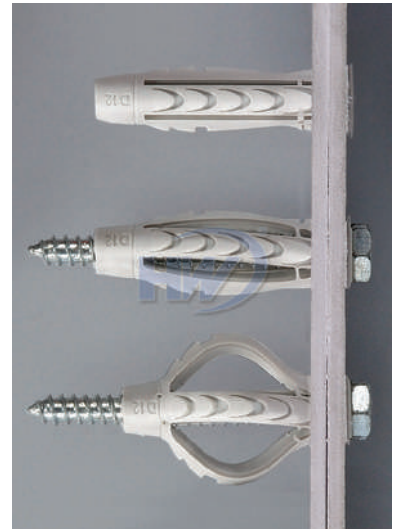


# WALL PLUGS

- 4-way expansion form lock guarantees highest grip
- Anti-rotation lugs prevent the plug rotating in the drill hole
- The special spread-free neck prevents damage of tiles and plaster
- Simple and quick push-through installation reduces installation time
- Material: Polyamide 6, UL94V-2
- Color: Grey, RAL 7035

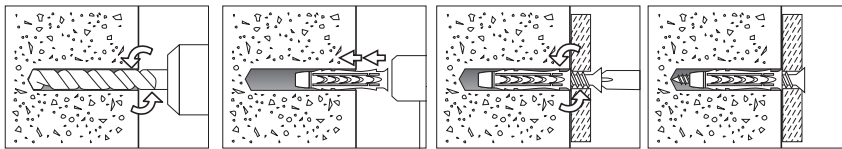

Anchor

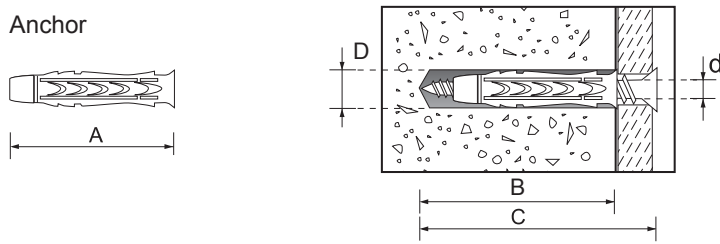

Fastening System  
Fasteners



Part No.	Anchor Length (A) mm (inch)	Drill Hole Ø (D) mm (inch)	Drill Hole Depth (B) mm (inch)	Screw Size (dxC) mm (inch)
WA-D5	25.4 (1.00)	5.8 (0.23)	35.0 (1.38)	ø4.0 x 30~35 (ø0.16x1.18~1.38)
WA-D6	30.0 (1.18)	6.0 (0.24)	40.0 (1.57)	ø4.5 x 35~40 (ø0.18x1.38~1.57)
WA-D8	40.0 (1.57)	8.0 (0.31)	50.0 (1.97)	ø5.0 x 45~50 (ø0.20x1.77~1.97)
WA-D10	50.0 (1.97)	10.0 (0.39)	70.0 (2.76)	ø6.5 x 55~70 (ø0.26x2.17~2.76)
WA-D12	60.0 (2.36)	12.0 (0.47)	80.0 (3.15)	ø7.5 x 65~80 (ø0.30x2.56~3.15)

\* Screws are available upon request



Paper Box