





STANDARD CABLE TIES - FLAME RETARDANT

- One-piece construction with lowest threading force
- Wide application from general to heavy duty cable management
- Material: Polyamide 6.6, UL94V-0
- Color: Black

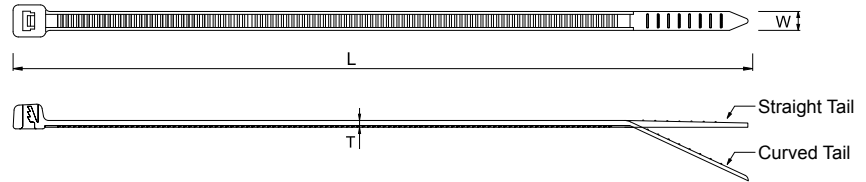

Part No.	Length (L)		Width (W)		Thickness (T)		Max. Bundle Ø		Min. Loop Tensile Str.			Tip Design		Std. Pkg. Qty.
	mm	in.	mm	in.	mm	in.	mm	in.	N	kgf	lbf	Curved	Straight	
MINIATURE TYPE														
GT-100MV0	100.0	3.94	2.5	0.10	1.1	0.04	22.0	0.87	80	8.2	18	•		1000
GT-140MV0	140.0	5.51	2.5	0.10	1.1	0.04	33.0	1.30	80	8.2	18	•		1000
INTERMEDIATE TYPE														
GT-150IV0	150.0	5.91	3.6	0.14	1.2	0.05	35.0	1.38	178	18.2	40	•		1000
GT-300IV0	300.0	1.81	3.6	0.14	1.2	0.05	76.0	2.99	178	18.2	40	•		1000
STANDARD TYPE														
GT-200STV0	200.0	7.87	4.8	0.19	1.3	0.05	50.0	1.97	222	22.6	50	•		1000
GT-300STV0	300.0	1.81	4.8	0.19	1.3	0.05	76.0	2.99	222	22.6	50	•		1000
GT-370STV0	370.0	14.57	4.8	0.19	1.3	0.05	102.0	4.02	222	22.6	50	•		100
LIGHT HEAVY DUTY TYPE														
GT-370HDV0	370.0	4.57	7.6	0.30	1.6	0.06	102.0	4.02	534	54.5	120		•	100
GT-750HD-SV0	750.0	9.53	7.6	0.30	1.6	0.06	218.0	8.58	534	54.5	120		•	100
HEAVY DUTY TYPE														
GT-430HDV0	430.0	6.93	9.0	0.35	1.8	0.07	125.0	4.92	778	79.3	175		•	100
GT-710HDV0	710.0	7.95	9.0	0.35	1.8	0.07	190.0	7.48	778	79.3	175		•	100
EXTRA HEAVY DUTY TYPE														
GT-230EHDV0	230.0	9.06	12.6	0.50	2.0	0.08	50.0	1.97	1112	113.4	250		•	100
GT-580EHDV0	580.0	2.83	12.6	0.50	2.0	0.08	152.0	5.98	1112	113.4	250		•	100