
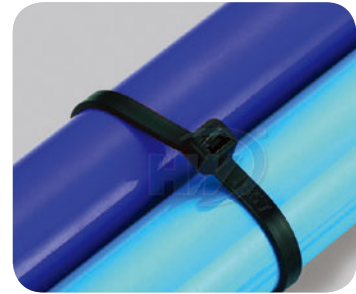


STANDARD CABLE TIES - HEAT STABILIZED

- One-piece construction with lowest threading force
- Wide application from general to heavy duty cable management
- Material: Polyamide 6.6, heat-stabilized, UL94V-2
- Color: Black

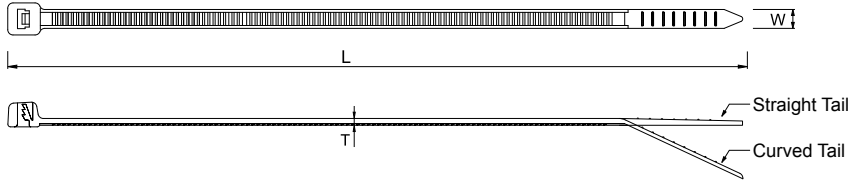

Part No.	Length (L)		Width (W)		Thickness (T)		Max. Bundle Ø		Min. Loop Tensile Str.			Tip Design		Std. Pkg. Qty.
	mm	in.	mm	in.	mm	in.	mm	in.	N	kgf	lbf	Curved	Straight	
MINIATURE TYPE														
GT-100MH	100.0	3.94	2.5	0.10	1.1	0.04	22.0	0.87	80	8.2	18	•		1000
GT-120MH	120.0	4.72	2.5	0.10	1.1	0.04	30.0	1.18	80	8.2	18	•		1000
GT-160MH	160.0	6.30	2.5	0.10	1.1	0.04	40.0	1.57	80	8.2	18	•		1000
INTERMEDIATE TYPE														
GT-140IH	140.0	5.51	3.6	0.14	1.2	0.05	33.0	1.30	178	18.2	40	•		1000
GT-150IH	150.0	5.91	3.6	0.14	1.2	0.05	35.0	1.38	178	18.2	40	•		1000
GT-200IH	200.0	7.87	3.6	0.14	1.2	0.05	53.0	2.09	178	18.2	40	•		1000
GT-300IH	300.0	11.81	3.6	0.14	1.2	0.05	76.0	2.99	178	18.2	40	•		1000
STANDARD TYPE														
GT-190STH	190.0	7.48	4.8	0.19	1.4	0.06	46.0	1.81	222	22.6	50	•		1000
GT-200STH	200.0	7.87	4.8	0.19	1.3	0.05	50.0	1.97	222	22.6	50	•		1000
GT-280STH	280.0	11.02	4.8	0.19	1.3	0.05	70.0	2.76	222	22.6	50	•		1000
GT-300STH	300.0	11.81	4.8	0.19	1.3	0.05	76.0	2.99	222	22.6	50	•		1000
GT-370STH	370.0	14.57	4.8	0.19	1.3	0.05	102.0	4.02	222	22.6	50	•		100
GT-430STH	430.0	16.93	4.8	0.19	1.3	0.05	110.0	4.33	222	22.6	50		•	100
LIGHT HEAVY DUTY TYPE														
GT-280HDH	280.0	11.02	7.6	0.30	1.6	0.06	71.0	2.80	534	54.5	120		•	100
GT-300HDH	300.0	11.81	7.6	0.30	1.6	0.06	76.0	2.99	534	54.5	120		•	100
GT-370HDH	370.0	14.57	7.6	0.30	1.6	0.06	102.0	4.02	534	54.5	120		•	100
HEAVY DUTY TYPE														
GT-430HDH	430.0	16.93	9.0	0.35	1.8	0.07	125.0	4.92	778	79.3	175		•	100
GT-450HDH	450.0	17.72	9.0	0.35	1.8	0.07	132.0	5.20	778	79.3	175		•	100
GT-530HDH	530.0	20.87	9.0	0.35	1.8	0.07	140.0	5.51	778	79.3	175		•	100
GT-780HDH	778.0	30.63	9.0	0.35	1.8	0.07	228.0	8.98	778	79.3	175		•	100
EXTRA HEAVY DUTY TYPE														
GT-580EHDH	580.0	22.83	12.6	0.50	2.0	0.08	152.0	5.98	1112	113.4	250		•	100
GT-1030EHDH	1020.0	40.16	12.6	0.50	2.0	0.08	295.0	11.61	1112	113.4	250		•	100