




## STANDARD CABLE TIES - WEATHER RESISTANT

- One-piece construction with lowest threading force
- Wide application from general to heavy duty cable management
- Material: Polyamide 6.6, UV-resistant, UL94V-2
- Color: Black

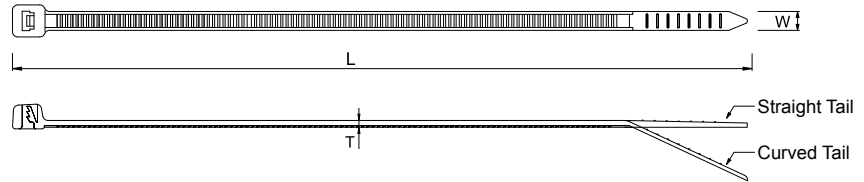

Part No.	Length (L)		Width (W)		Thickness (T)		Max. Bundle Ø		Min. Loop Tensile Str.			Tip Design		Std. Pkg. Qty.
	mm	in.	mm	in.	mm	in.	mm	in.	N	kgf	lbf	Curved	Straight	
<b>MINIATURE TYPE</b>														
GT-100MUV	100.0	3.94	2.5	0.10	1.1	0.04	22.0	0.87	80	8.2	18	•		1000
GT-140MUV	140.0	5.51	2.5	0.10	1.1	0.04	33.0	1.30	80	8.2	18	•		1000
GT-160MUV	160.0	6.30	2.5	0.10	1.1	0.04	40.0	1.57	80	8.2	18	•		1000
GT-200MUV	200.0	7.87	2.5	0.10	1.2	0.05	53.0	2.09	80	8.2	18	•		1000
<b>INTERMEDIATE TYPE</b>														
GT-150IUV	150.0	5.91	3.6	0.14	1.2	0.05	35.0	1.38	178	18.2	40	•		1000
GT-200IUV	200.0	7.87	3.6	0.14	1.2	0.05	53.0	2.09	178	18.2	40	•		1000
GT-300IUV	300.0	11.81	3.6	0.14	1.2	0.05	76.0	2.99	178	18.2	40	•		1000
GT-370IUV	370.0	14.57	3.6	0.14	1.3	0.05	102.0	4.02	178	18.2	40		•	1000
<b>STANDARD TYPE</b>														
GT-200STUV	200.0	7.87	4.8	0.19	1.3	0.05	50.0	1.97	222	22.6	50	•		1000
GT-300STUV	300.0	11.81	4.8	0.19	1.3	0.05	76.0	2.99	222	22.6	50	•		1000
GT-370STUV	370.0	14.57	4.8	0.19	1.3	0.05	102.0	4.02	222	22.6	50	•		100
GT-430STUV	430.0	16.93	4.8	0.19	1.3	0.05	110.0	4.33	222	22.6	50		•	100
<b>LIGHT HEAVY DUTY TYPE</b>														
GT-300HUV	300.0	11.81	7.6	0.30	1.6	0.06	76.0	2.99	534	54.5	120		•	100
GT-370HUV	370.0	14.57	7.6	0.30	1.6	0.06	102.0	4.02	534	54.5	120		•	100
GT-450HD-SUV	450.0	17.72	7.6	0.30	1.8	0.07	130.0	5.12	534	54.5	120		•	100
GT-600HD-SUV	603.0	23.74	7.6	0.30	1.6	0.06	175.0	6.89	534	54.5	120		•	100
<b>HEAVY DUTY TYPE</b>														
GT-530HUV	530.0	20.87	9.0	0.35	1.8	0.07	140.0	5.51	778	79.3	175		•	100
GT-630HUV	609.0	23.98	9.0	0.35	1.8	0.07	187.0	7.36	778	79.3	175		•	100
GT-780HUV	778.0	30.63	9.0	0.35	1.8	0.07	228.0	8.98	778	79.3	175		•	100
GT-920HUV	916.0	36.06	9.0	0.35	1.8	0.07	263.0	10.35	778	79.3	175		•	100
<b>EXTRA HEAVY DUTY TYPE</b>														
GT-380EHUV	380.0	14.96	12.6	0.50	2.0	0.08	106.0	4.17	1112	113.4	250		•	100
GT-480EHUV	480.0	18.90	12.6	0.50	2.0	0.08	120.0	4.72	1112	113.4	250		•	100
GT-580EHUV	580.0	22.83	12.6	0.50	2.0	0.08	152.0	5.98	1112	113.4	250		•	100