



## STAINLESS STEEL LADDER CABLE TIES


- The unique multi-locking system for strong secure hold and tensile strength
- Larger slot at the cable tie end allows the use of a hook-type tool
- Material: Stainless steel type: #316
- Length: All lengths are available upon request



Insert the tail into the buckle.



The one-way indentation of the buckle will lock the ladder on the tie.

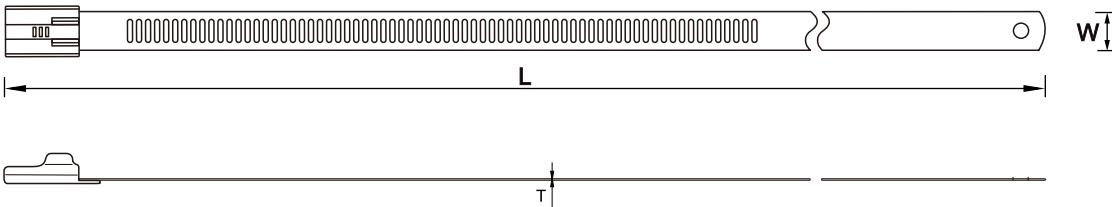

Part No.	Length (L)		Width (W)		Thickness (T)		Max. Bundle Ø		Min. Loop Tensile Str.			Std. Pkg. Qty.
	mm	in.	mm	in.	mm	in.	mm	in.	N	kgf	lbf	
<b>STANDARD TYPE</b>												
MLL-150ST	150.0	5.91	7.0	0.28	0.3	0.01	40.0	1.57	1112	114.0	250	100
MLL-225ST	225.0	8.86	7.0	0.28	0.3	0.01	62.0	2.44	1112	114.0	250	100
MLL-300ST	300.0	11.81	7.0	0.28	0.3	0.01	81.0	3.19	1112	114.0	250	100
MLL-400ST	400.0	15.75	7.0	0.28	0.3	0.01	113.0	4.45	1112	114.0	250	100
MLL-450ST	450.0	17.72	7.0	0.28	0.3	0.01	127.0	5.00	1112	114.0	250	100
MLL-550ST	550.0	21.65	7.0	0.28	0.3	0.01	159.0	6.26	1112	114.0	250	50
MLL-600ST	600.0	23.62	7.0	0.28	0.3	0.01	176.0	6.93	1112	114.0	250	50
MLL-700ST	700.0	27.56	7.0	0.28	0.3	0.01	207.0	8.15	1112	114.0	250	50
MLL-800ST	800.0	31.50	7.0	0.28	0.3	0.01	238.0	9.37	1112	114.0	250	50
<b>HEAVY DUTY TYPE</b>												
MLL-150HD	150.0	5.91	12.0	0.47	0.4	0.01	40.0	1.57	2000	205.2	450	50
MLL-225HD	225.0	8.86	12.0	0.47	0.4	0.01	62.0	2.44	2000	205.2	450	50
MLL-300HD	300.0	11.81	12.0	0.47	0.4	0.01	81.0	3.19	2000	205.2	450	50
MLL-400HD	400.0	15.75	12.0	0.47	0.4	0.01	113.0	4.45	2000	205.2	450	50
MLL-450HD	450.0	17.72	12.0	0.47	0.4	0.01	127.0	5.00	2000	205.2	450	50
MLL-550HD	550.0	21.65	12.0	0.47	0.4	0.01	159.0	6.26	2000	205.2	450	50
MLL-600HD	600.0	23.62	12.0	0.47	0.4	0.01	176.0	6.93	2000	205.2	450	50
MLL-700HD	700.0	27.56	12.0	0.47	0.4	0.01	207.0	8.15	2000	205.2	450	50
MLL-800HD	800.0	31.50	12.0	0.47	0.4	0.01	238.0	9.37	2000	205.2	450	50