
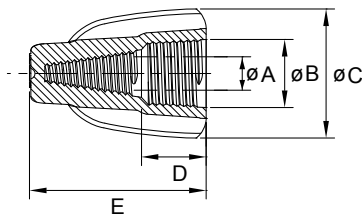


W SERIES WINGED WIRE CONNECTORS


- 5 color-coded models cover a full range of wire sizes from 18 through 8 AWG
- Big wings with molded vertical ribs provide a secure grip for more torque on maximum wire combinations
- Fixed, square-wire spring maintains a strong grip that wire connections will not relax over time
- No pre-twisting required - positive grip design provides fast, easy installation
- Deep skirt helps protect against flash-over and turned-back strands for maximum dielectric protection
- Tough, UL94V-2 flame-retardant shell rated at 105°C (221°F)
- UL Listed to 486C and comply with Federal Specification W-S-610E
- Material: UL approved PP, steel spring

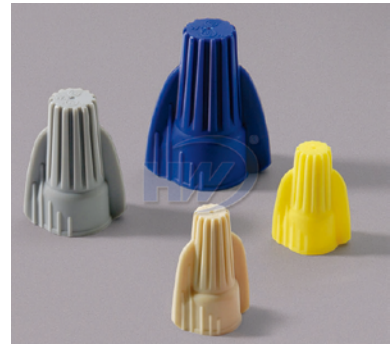

Part No.	Temp Rating	Voltage	Dimension mm (inch)					Suitable Wire AWG	Wire Strip Length mm (inch)	Color
			A	B	C	D	E			
W1	105°C (221°F)	600V	ø6.7 (0.26)	ø10.0 (0.39)	ø19.0 (0.75)	8.7 (0.34)	25.9 (1.02)	18-10	14.0 (0.55)	Yellow
W2	105°C (221°F)	600V	ø7.8 (0.31)	ø11.2 (0.44)	ø19.0 (0.75)	8.6 (0.34)	28.9 (1.14)	18-8	14.0 (0.55)	Tan
W3	105°C (221°F)	600V	ø9.4 (0.37)	ø13.3 (0.52)	ø22.9 (0.90)	9.2 (0.36)	31.9 (1.26)	18-8	12.0 (0.47)	Red
W4	105°C (221°F)	600V	ø10.5 (0.41)	ø14.5 (0.57)	ø25.1 (0.99)	9.6 (0.38)	32.8 (1.29)	18-10	14.0 (0.55)	Grey
W5	105°C (221°F)	600V	ø12.8 (0.50)	ø17.5 (0.69)	ø31.8 (1.25)	12.5 (0.49)	40.2 (1.58)	12-8	20.0 (0.79)	Blue

WINGED GROUNDING WIRE CONNECTORS

- Designed for making ground connections
- Big wings with molded vertical ribs provide a secure grip for more torque on maximum wire combinations
- Fixed, square-wire spring maintains a strong grip that wire connections will not relax over time
- Tough, UL94V-2 flame-retardant shell
- UL Listed to 467 and complies with Federal Specification W-S-610E
- Material: UL approved PP, steel spring

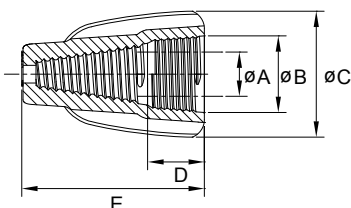

Part No.	Temp Rating	Voltage	Dimension mm (inch)					Suitable Wire AWG	Wire Strip Length mm (inch)	Color
			A	B	C	D	E			
WG	105°C (221°F)	600V	ø9.4 (0.37)	ø12.2 (0.48)	ø19.9 (0.78)	9.1 (0.36)	28.9 (1.14)	14-10	12.0 (0.47)	Green