


CONDUIT MOUNTING BRACKETS


- Apply for fixing the conduits. With screw on the bottom to fix on wall or ceil
- Applicable for joint together for multiple conduits
- U type is easy to clip and unfasten
- The cap design can secure the fixed of conduits
- Material: Polyamide 6,6, UL94V-2
- Color: Black



U Type

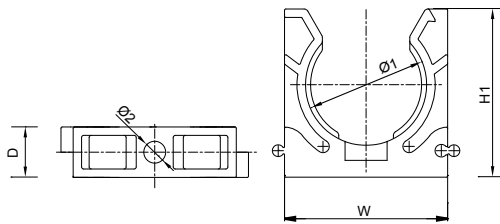

Capped Type

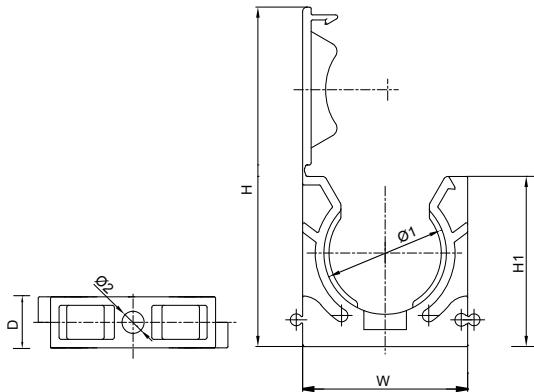

Part No.		Nominal Dimension		Suitable Conduits	W mm (inch)	H mm (inch)	H1 mm (inch)	D mm (inch)	Ø 1 mm (inch)	Ø 2 mm (inch)	Mounting Screw
U Type	Capped	mm	inch								
XFN-07	XFW-07	6.4	1/4"	NFC-07	19.5 (0.77)	40.9 (1.61)	20.6 (0.81)	10.0 (0.39)	Ø10.1 (0.40)	Ø4.5 (0.18)	M4 x15-30
XFN-10	XFW-10	7.9	5/16"	NFC-10	22.5 (0.89)	46.8 (1.84)	23.5 (0.93)	10.0 (0.39)	Ø13.2 (0.52)	Ø4.5 (0.18)	M4 x15-30
XFN-12	XFW-12	9.5	3/8"	NFC-12	25.4 (1.00)	52.4 (2.06)	26.2 (1.03)	10.0 (0.39)	Ø16.0 (0.63)	Ø4.5 (0.18)	M4 x15-30
XFN-17	XFW-17	12.7	1/2"	NFC-17	31.0 (1.22)	63.0 (2.48)	31.0 (1.22)	10.0 (0.39)	Ø21.5 (0.85)	Ø4.5 (0.18)	M4 x15-30
XFN-23	XFW-23	19.1	3/4"	NFC-23	38.8 (1.53)	79.8 (3.14)	40.0 (1.57)	12.0 (0.47)	Ø28.8 (1.13)	Ø5.5 (0.22)	M5 x15-30
XFN-28	XFW-28	25.4	1"	NFC-28	47.0 (1.85)	94.6 (3.72)	46.2 (1.82)	12.0 (0.47)	Ø34.8 (1.37)	Ø5.5 (0.22)	M5 x15-30
XFN-36	XFW-36	31.8	1-1/4"	NFC-36	55.8 (2.20)	113.3 (4.46)	56.0 (2.20)	16.0 (0.63)	Ø42.8 (1.69)	Ø6.2 (0.24)	M6 x15-30
XFN-48	XFW-48	50.8	2"	NFC-48	70.0 (2.76)	140.1 (5.52)	68.2 (2.69)	20.0 (0.79)	Ø54.8 (2.16)	Ø6.5 (0.26)	M6 x15-30

Cable Protection
Conduits & Fittings