


CABLE CLAMPS

- Light weight design with strong fixing particularly suitable for use in environments with high UV, solar industry, aircraft and aerospace
- Good UV and temperature resistant and high strength
- Material: Polyamide 12, UL94HB
- Operating temperature: -40 ~ 95°C (-40 ~ 203°F)
- Color: Black



Part No.	Mounting Hole Centers (A) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø (E) mm (inch)	Mounting Hole ø mm (inch)
GCL-1/8-PA12	9.1 (0.36)	12.7 (0.50)	1.5 (0.06)	2.9 (0.11)	5.4 (0.21)
GCL-1/8S-PA12	8.2 (0.32)	9.1 (0.36)	1.3 (0.05)	3.3 (0.13)	5.5 (0.21)
GCL-3/16S-PA12	9.6 (0.38)	9.1 (0.36)	1.3 (0.05)	4.8 (0.19)	5.5 (0.21)
GCL-1/4-PA12	11.4 (0.45)	12.7 (0.50)	1.5 (0.06)	5.9 (0.23)	5.3 (0.21)
GCL-1/4S-PA12	10.3 (0.41)	9.1 (0.36)	1.3 (0.05)	6.6 (0.26)	5.5 (0.21)
GCL-5/16L-PA12	10.6 (0.42)	12.7 (0.50)	1.3 (0.05)	7.6 (0.30)	4.4 (0.17)
GCL-5/16S-PA12	10.6 (0.42)	9.1 (0.36)	1.3 (0.05)	7.8 (0.31)	5.5 (0.21)
GCL-3/8-PA12	13.4 (0.53)	12.1 (0.48)	1.5 (0.06)	9.1 (0.36)	5.3 (0.21)
GCL-3/8S-PA12	11.9 (0.47)	9.2 (0.36)	1.3 (0.05)	9.7 (0.38)	5.5 (0.21)
GCL-1/2-PA12	15.0 (0.59)	12.7 (0.50)	1.5 (0.06)	12.2 (0.48)	5.3 (0.21)
GCL-1/2S-PA12	23.8 (0.94)	9.4 (0.37)	1.3 (0.05)	12.7 (0.5)	5.4 (0.21)
GCL-9/16-PA12	15.8 (0.62)	12.7 (0.50)	1.5 (0.06)	13.8 (0.54)	5.3 (0.21)
GCL-5/8-PA12	27.2 (1.07)	12.4 (0.49)	1.3 (0.05)	15.5 (0.61)	5.3 (0.21)
GCL-3/4-PA12	19.8 (0.78)	12.7 (0.50)	1.5 (0.06)	18.6 (0.73)	5.3 (0.21)
GCL-7/8-PA12	21.4 (0.84)	12.7 (0.50)	1.5 (0.06)	21.8 (0.86)	5.3 (0.21)
GCL-1-1/8-PA12	24.6 (0.97)	12.7 (0.50)	1.5 (0.06)	27.9 (1.10)	5.3 (0.21)

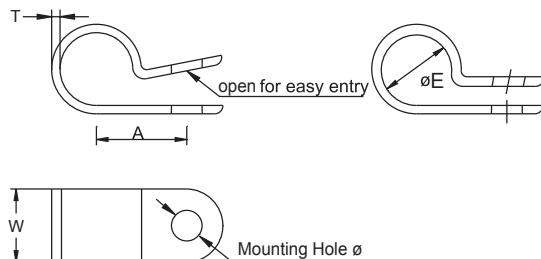