



# CHEMICAL RESISTANT CABLE TIES

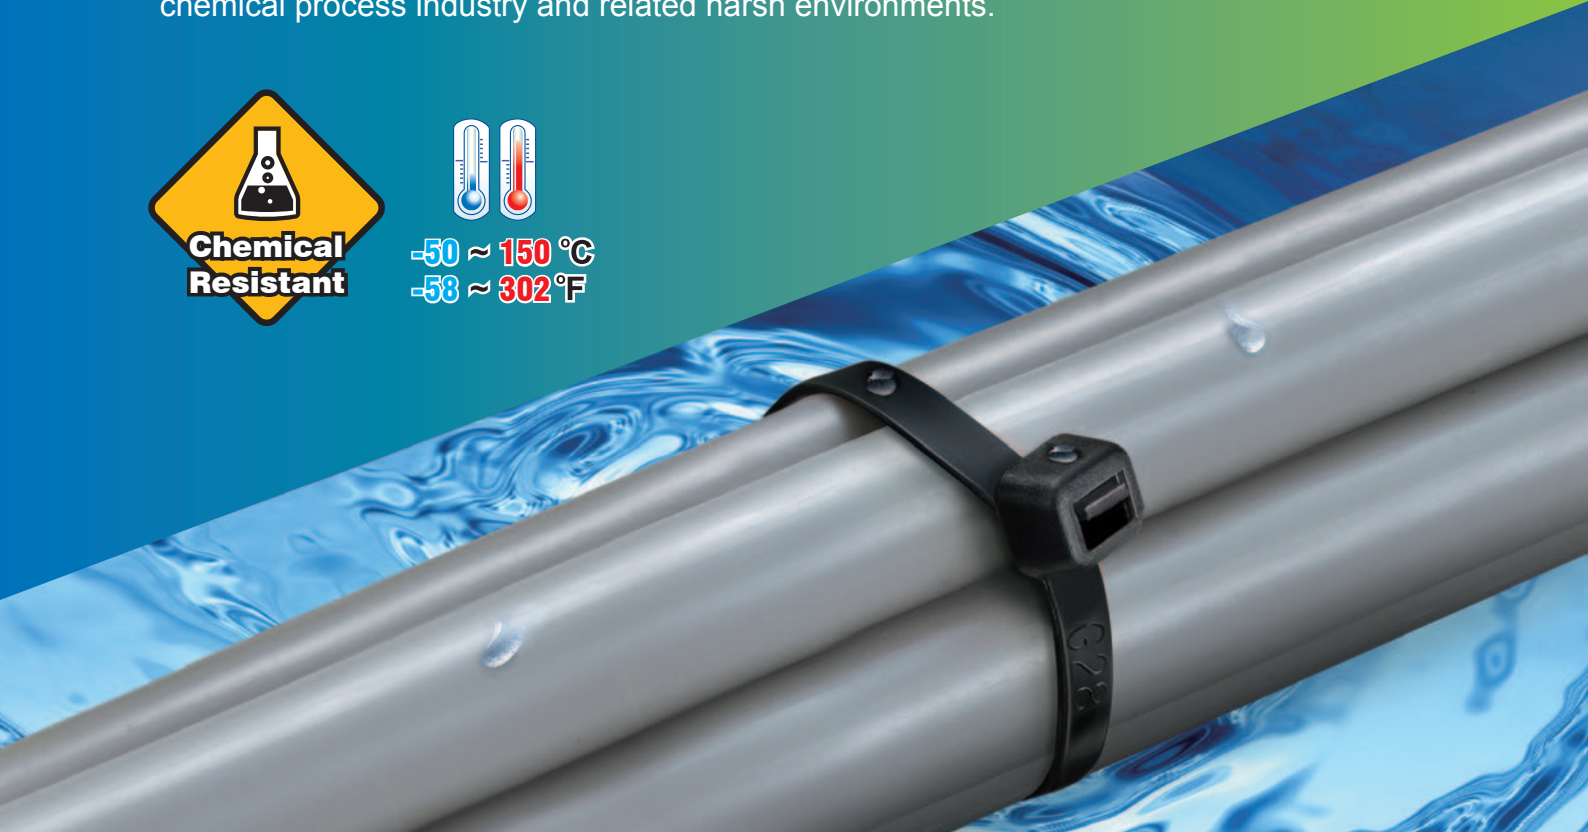

Chemical Resistant Cable Ties can be used in severe environments including Salts, Hydrocarbons (Oil, Lubricants), Chlorinated Hydrocarbons, Acids, Bases, Acid Rain, and High Temperature Applications. Ideal for use in the chemical process industry and related harsh environments.



# CHEMICAL RESISTANT CABLE TIES

- ETFE is superior resistance to chemical attack.
- Continuous operating temperatures up to 150° C (302° F).
- One-piece construction for consistent performance and reliability.
- Internal serrations allowing for a positive hold.
- Material Flammability Rating: UL94V-0.
- Color: Black



Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Max.Bundle $\varnothing$ mm (inch)	Min. Loop Tensile Strength			Recommended Tensioning Tools
				N	kgf	lbf	
CR-100M	102 (4.02)	2.4 (0.09)	22 (0.87)	80	8.2	18	 GIT-703
CR-150I	150 (5.91)	3.6 (0.14)	33 (1.30)	178	18.2	40	
CR-200I	200 (7.87)	3.6 (0.14)	53 (2.09)	178	18.2	40	
CR-190ST	190 (7.48)	4.6 (0.18)	46 (1.81)	222	22.6	50	
CR-200ST	200 (7.87)	4.6 (0.18)	50 (1.97)	222	22.6	50	
CR-300ST	300 (11.81)	4.8 (0.19)	76 (2.99)	222	22.6	50	
CR-370ST	370 (14.57)	4.6 (0.18)	102 (4.02)	222	22.6	50	
CR-300HD	300 (11.81)	7.3 (0.29)	76 (2.99)	445	45.4	100	 GIT-704G
CR-370HD	370 (14.57)	7.4 (0.29)	102 (4.02)	445	45.4	100	
CR-430HD	435 (17.13)	8.8 (0.35)	125 (4.92)	445	45.4	100	



## HUA WEI INDUSTRIAL CO., LTD.

No.1, Gongyequ 26th Rd., Nantun Dist., Taichung City 408, Taiwan, R.O.C.  
 ☎ +886-4-23597777 ✉ service@hwlok.com 🌐 www.hwlok.com

