

STAINLESS STEEL CABLE TIES - BALL-LOCK UNCOATED TIES

Fastening System
Stainless Steel Ties

Ball lock type stainless steel cable ties of unique self-locking mechanism allows quick and reliable application with low insertion force required. Both of coated and uncoated products are available; Coated products provide excellent insulation and protection for cables and pipes. Uncoated tie is ideal for being applied for extreme environment temperature applications.

Product Feature:

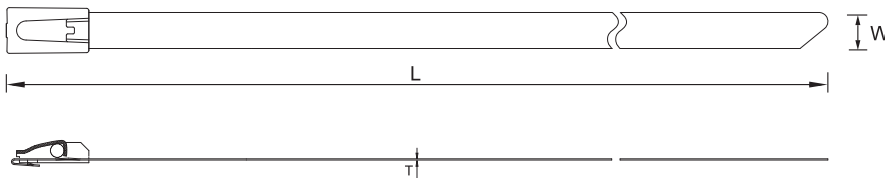
Uncoated version, for high temperature applications



Applications:

ideal for petrochemical, food industry, industries, power stations, mining, ship-building, offshore and any other aggressive environments.

Technical Information:

- Material: Stainless Steel Grade 304 or 316
304 grade stainless steel, for standard applications
316 grade stainless steel, for extra corrosive environments
- Working Temp.: -60°C to 300°C
- Description: Metallic band and buckle
- Flammability: Fireproof
- Other Properties: UV-resistant.



Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength			Recommended Tensioning tools
					N	kgf	lbf	
MLG-130ST	130 (5.08)	4.6 (0.18)	0.26 (0.01)	33 (1.30)	445	45.4	100	
MLG-152ST	150 (5.91)	4.6 (0.18)	0.26 (0.01)	40 (1.57)	445	45.4	100	
MLG-200ST	200 (7.87)	4.6 (0.18)	0.26 (0.01)	50 (1.97)	445	45.4	100	
MLG-280ST	280 (11.02)	4.6 (0.18)	0.26 (0.01)	70 (2.76)	445	45.4	100	
MLG-300ST	300 (11.81)	4.6 (0.18)	0.26 (0.01)	76 (2.99)	445	45.4	100	
MLG-370ST	370 (14.57)	4.6 (0.18)	0.26 (0.01)	102 (4.02)	445	45.4	100	
MLG-520ST	520 (20.47)	4.6 (0.18)	0.26 (0.01)	156 (6.14)	445	45.4	100	
MLG-680ST	680 (26.77)	4.6 (0.18)	0.26 (0.01)	207 (8.15)	445	45.4	100	
MLG-840ST	840 (33.07)	4.6 (0.18)	0.26 (0.01)	257 (10.12)	445	45.4	100	
MLG-1050ST	1050 (41.34)	4.6 (0.18)	0.26 (0.01)	319 (12.56)	445	45.4	100	
MLG-152HD	150 (5.91)	7.9 (0.31)	0.26 (0.01)	40 (1.57)	1112	113.4	250	
MLG-200HD	200 (7.76)	7.9 (0.31)	0.26 (0.01)	50 (1.97)	1112	113.4	250	
MLG-300HD	300 (11.81)	7.9 (0.31)	0.26 (0.01)	76 (2.99)	1112	113.4	250	
MLG-370HD	370 (14.49)	7.9 (0.31)	0.26 (0.01)	102 (4.02)	1112	113.4	250	
MLG-450HD	450 (17.72)	7.9 (0.31)	0.26 (0.01)	135 (5.31)	1112	113.4	250	
MLG-500HD	500 (19.69)	7.9 (0.31)	0.26 (0.01)	150 (5.91)	1112	113.4	250	
MLG-680HD	680 (26.77)	7.9 (0.31)	0.26 (0.01)	207 (8.15)	1112	113.4	250	
MLG-720HD	720 (28.35)	7.9 (0.31)	0.26 (0.01)	216 (8.50)	1112	113.4	250	
MLG-840HD	840 (33.07)	7.9 (0.31)	0.26 (0.01)	257 (10.12)	1112	113.4	250	
MLG-1020HD	1020 (40.16)	7.9 (0.31)	0.26 (0.01)	312 (12.28)	1112	113.4	250	
MLG-1050HD	1050 (41.34)	7.9 (0.31)	0.26 (0.01)	319 (12.56)	1112	113.4	250	