

STAINLESS STEEL CABLE TIES - BALL-LOCK EPOXY COATED TIES

Ball lock type stainless steel cable ties of unique self-locking mechanism allows quick and reliable application with low insertion force required. Both of coated and uncoated products are available; Coated products provide excellent insulation and protection for cables and pipes. Uncoated tie is ideal for being applied for extreme environment temperature applications.



Product Feature:


- Coated band with non-toxic, halogen free polyester coating
- Provides additional edge protection
- Prevents the corrosion between dissimilar materials.
- Metallic buckle helps to distinguish from black nylon tie.

Applications:

Ideal for petrochemical, Industries, power stations, mining, ship-building, offshore, and other aggressive environments.

Technical Information:

- Material: Stainless Steel Grade 304 or 316
304 grade stainless steel, for standard applications
316 grade stainless steel, for extra corrosive environments
- Working Temp.: -80°C to 150°C
- Description: Black Band with Metallic Buckle
- Flammability: Fireproof
- Other Properties: UV-resistant, non toxic

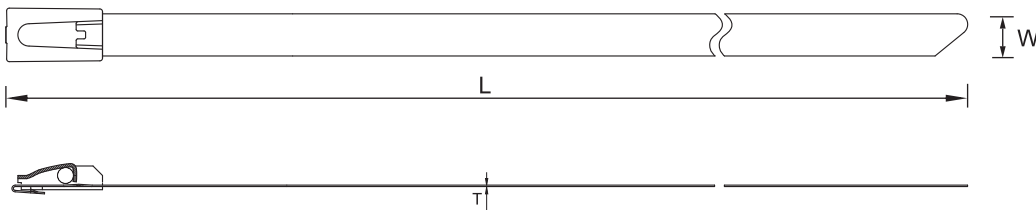

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength		
					N	kgf	lbf
MLG-130STE	130 (5.08)	4.6 (0.18)	0.39 (0.014)	33 (1.30)	600	72.4	135
MLG-200STE	200 (7.87)	4.6 (0.18)	0.39 (0.014)	50 (1.97)	600	72.4	135
MLG-300STE	300 (11.81)	4.6 (0.18)	0.39 (0.014)	76 (2.99)	600	72.4	135
MLG-370STE	370 (14.57)	4.6 (0.18)	0.39 (0.014)	102 (4.02)	600	72.4	135
MLG-520STE	520 (20.47)	4.6 (0.18)	0.39 (0.014)	156 (6.14)	600	72.4	135
MLG-680STE	680 (26.77)	4.6 (0.18)	0.39 (0.014)	207 (8.15)	600	72.4	135
MLG-840STE	840 (33.07)	4.6 (0.18)	0.39 (0.014)	257 (10.10)	600	72.4	135
MLG-1050STE	1050 (41.34)	4.6 (0.18)	0.39 (0.014)	319 (12.56)	600	72.4	135
MLG-200HDE	200 (7.76)	7.9 (0.31)	0.39 (0.014)	50 (1.97)	800	114	180
MLG-300HDE	300 (11.81)	7.9 (0.31)	0.39 (0.014)	76 (3.00)	800	114	180
MLG-370HDE	370 (14.49)	7.9 (0.31)	0.39 (0.014)	102 (4.02)	800	114	180
MLG-450HDE	450 (17.72)	7.9 (0.31)	0.39 (0.014)	115 (4.50)	800	114	180
MLG-500HDE	500 (19.69)	7.9 (0.31)	0.39 (0.014)	128 (5.00)	800	114	180
MLG-680HDE	680 (26.77)	7.9 (0.31)	0.39 (0.014)	207 (8.15)	800	114	180
MLG-720HDE	720 (28.35)	7.9 (0.31)	0.39 (0.014)	216 (8.50)	800	114	180
MLG-840HDE	840 (33.07)	7.9 (0.31)	0.39 (0.014)	257 (10.10)	800	114	180
MLG-1020HDE	1020 (40.16)	7.9 (0.31)	0.39 (0.014)	312 (12.30)	800	114	180
MLG-1050HDE	1050 (41.34)	7.9 (0.31)	0.39 (0.014)	319 (12.56)	800	114	180