




RELEASABLE TYPE STAINLESS STEEL TIES

Fastening System
Stainless Steel Ties

- This product is releasable and can be double-wrapped for additional tensile strength
- Polyamide coating provides additional edge protection and prevents corrosion between dissimilar metals
- AISI 316 stainless steel for the most corrosive environments
- UV resistant, low smoke, halogen-free material
- Material: Stainless steel type: #304, 316
Coating: Epoxy and Polyamide are available
- Length: All lengths are available

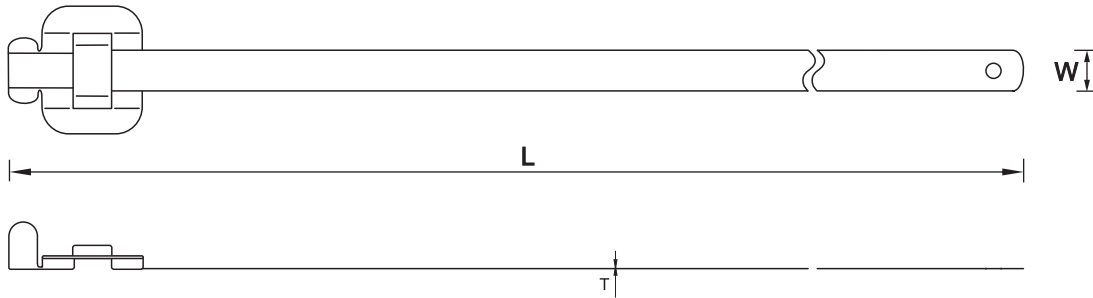

Insert the tail into the buckle.



Thread the tie through buckle, then tighten the bundle with crimping tool. Fold over the remaining tail of tie and secure by hammering down the ears of buckle. The remaining tie may be cut to finish the process.



Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength		
					N	kgf	lbf
MLR-150ST	150 (5.90)	6.4 (0.25)	0.38 (0.02)	38 (1.50)	334	34.1	75
MLR-230ST	230 (9.05)	6.4 (0.25)	0.38 (0.02)	63 (2.48)	334	34.1	75
MLR-305ST	305 (12.00)	6.4 (0.25)	0.38 (0.02)	86 (3.39)	334	34.1	75
MLR-460ST	460 (18.11)	6.4 (0.25)	0.38 (0.02)	137 (5.39)	334	34.1	75
MLR-610ST	610 (24.01)	6.4 (0.25)	0.38 (0.02)	185 (7.28)	334	34.1	75
MLR-150HD	150 (5.90)	9.6 (0.38)	0.38 (0.02)	38 (1.50)	1112	113.4	250
MLR-230HD	230 (9.05)	9.6 (0.38)	0.38 (0.02)	63 (2.48)	1112	113.4	250
MLR-305HD	305 (12.00)	9.6 (0.38)	0.38 (0.02)	86 (3.39)	1112	113.4	250
MLR-460HD	460 (18.11)	9.6 (0.38)	0.38 (0.02)	137 (5.39)	1112	113.4	250
MLR-610HD	610 (24.01)	9.6 (0.38)	0.38 (0.02)	185 (7.28)	1112	113.4	250