



TIGER TEETH TYPE STAINLESS STEEL TIES

- Available with various widths to choose from: 9.5 mm, 12.7 mm, 15.9 mm, 19.0 mm
- Protuberating L structure with serrated anti-locking design delivers advantages of speed installation and superior reliability
- Available with polyamide or epoxy resin coating options, which provide better protection on the tie body edges and prevent rust generation on metals from direct physical contact
- Applicable for use by a wide variety of industries inclusive of mess transportation, public signage, oil rig drilling, mining, chemical, and power generation etc. that require reliable fastening accessories
- Solid stainless steel with advantages of abrasive resistance, acid & alkali resistance, weathering resistance and flame resistance
- Material: Stainless steel type: #304, 316
Coating: Epoxy, Polyamide and Polyvinyl Chloride are available
- Length: All lengths are available

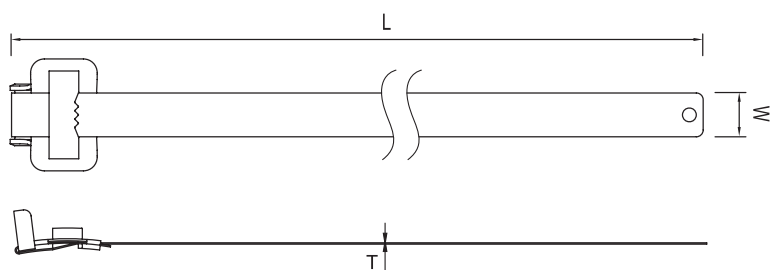

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength		
					N	kgf	lbf
MLT-3003HD	300 (11.81)	9.5 (0.37)	0.38 (0.02)	70 (2.76)	2225	227.0	500
MLT-4003HD	400 (15.75)	9.5 (0.37)	0.38 (0.02)	100 (3.94)	2225	227.0	500
MLT-5003HD	500 (19.69)	9.5 (0.37)	0.38 (0.02)	130 (5.12)	2225	227.0	500
MLT-6003HD	600 (23.62)	9.5 (0.37)	0.38 (0.02)	165 (6.50)	2225	227.0	500
MLT-3004HD	300 (11.81)	12.7 (0.50)	0.38 (0.02)	70 (2.76)	3115	317.6	700
MLT-4004HD	400 (15.75)	12.7 (0.50)	0.38 (0.02)	100 (3.94)	3115	317.6	700
MLT-5004HD	500 (19.69)	12.7 (0.50)	0.38 (0.02)	130 (5.12)	3115	317.6	700
MLT-6004HD	600 (23.62)	12.7 (0.50)	0.38 (0.02)	165 (6.50)	3115	317.6	700
MLT-3005HD	300 (11.81)	15.9 (0.63)	0.38 (0.02)	70 (2.76)	3560	363.0	800
MLT-4005HD	400 (15.75)	15.9 (0.63)	0.38 (0.02)	100 (3.94)	3560	363.0	800
MLT-5005HD	500 (19.69)	15.9 (0.63)	0.38 (0.02)	130 (5.12)	3560	363.0	800
MLT-6005HD	600 (23.62)	15.9 (0.63)	0.38 (0.02)	165 (6.50)	3560	363.0	800
MLT-3006HD	300 (11.81)	19.0 (0.75)	0.38 (0.02)	70 (2.76)	4450	453.8	1000
MLT-4006HD	400 (15.75)	19.0 (0.75)	0.38 (0.02)	100 (3.94)	4450	453.8	1000
MLT-5006HD	500 (19.69)	19.0 (0.75)	0.38 (0.02)	130 (5.12)	4450	453.8	1000
MLT-6006HD	600 (23.62)	19.0 (0.75)	0.38 (0.02)	165 (6.50)	4450	453.8	1000