


## SELF ADHESIVE CABLE TIE MOUNTS


- Available in either "screw mount" or "self adhesive mounting"
- Simple to install with a screw or bolt, the tie mounts give excellent security, particularly in areas of high vibration
- Designed to offer the maximum surface area, and in conjunction with the specially developed adhesive ensures that a very high pull-off force is achieved
- The tie mounts offer a '4-way' entry for the cable tie enabling quicker and more flexible installation
- Designed specifically for holding heavier cable bundles
- Material: Polyamide 6,6, UL94V-2
- Color: Natural, black

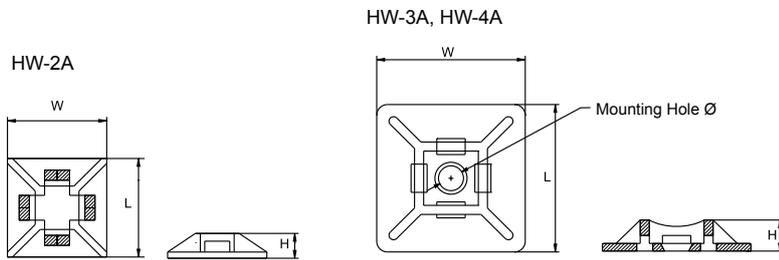

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Height (H) mm (inch)	Mounting Hole $\phi$ mm (inch)	Max. Tie Width mm (inch)
HW-2A	12.7 (0.50)	12.7 (0.50)	3.2 (0.13)	--	3.2 (0.13)
HW-3A	19.0 (0.75)	19.0 (0.75)	4.4 (0.17)	3.5 (0.14)	4.0 (0.16)
HW-4A	27.8 (1.09)	27.8 (1.09)	5.7 (0.22)	5.7 (0.22)	5.3 (0.21)

## SELF ADHESIVE WIRE SADDLES


- Easy mounting with adhesive tape
- HW-6A is able to fastened by screw to secure the fixture
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

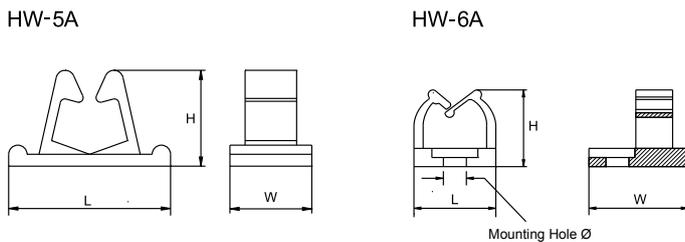

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Height (H) mm (inch)	Mounting Hole $\phi$ mm (inch)	Max. Bundle $\phi$ mm (inch)
HW-5A	17.6 (0.69)	8.9 (0.35)	10.5 (0.41)	--	8.4 (0.33)
HW-6A	8.8 (0.35)	10.8 (0.43)	8.4 (0.33)	2.5 (0.10)	5.0 (0.20)

# SELF ADHESIVE WIRE CLAMPS


- Wires, cables or hoses can be quickly and easily installed using these one piece fixing clips
- These clips are ideal for use in applications which are difficult to access, or for areas where self adhesive is the only possible fixing method (for example where fixing 'hole' would be unacceptable)
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

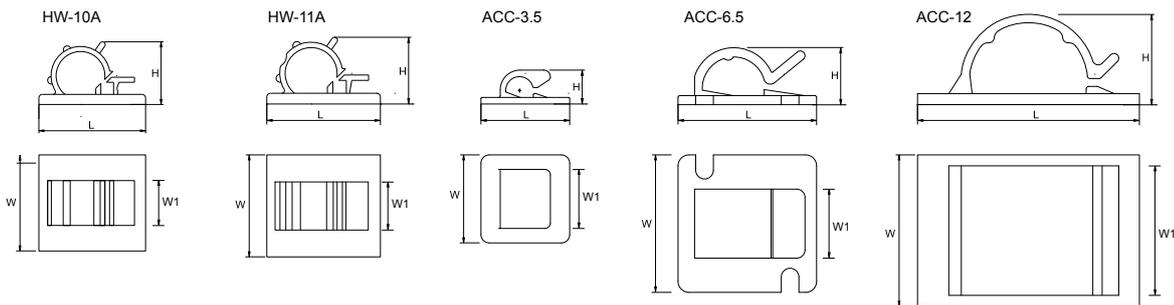

Part No.	L mm (inch)	W mm (inch)	W1 mm (inch)	H mm (inch)	Max.Bundle ø mm (inch)
HW-10A	21.5 (0.85)	17.0 (0.67)	12.0 (0.47)	15.0 (0.59)	11.0 (0.43)
HW-11A	21.5 (0.85)	18.2 (0.72)	8.4 (0.33)	12.3 (0.48)	8.7 (0.34)
ACC-3.5	16.1 (0.63)	16.1 (0.63)	10.8 (0.43)	6.2 (0.24)	4.0 (0.16)
ACC-6.5	25.1 (0.99)	25.1 (0.99)	12.6 (0.50)	10.4 (0.41)	7.0 (0.28)
ACC-12	33.5 (1.32)	27.7 (1.09)	23.7 (0.93)	16.2 (0.64)	13.0 (0.51)

# SADDLE TIE MOUNTS


- Curved design gives additional support to the cables
- Applied with screw or bolt for excellent security, particularly in areas of high vibration
- Designed specifically for holding heavier cable bundles
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

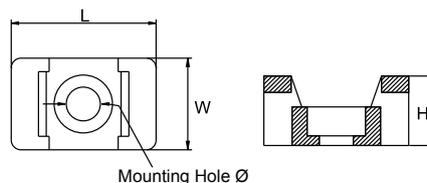

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Height (H) mm (inch)	Mounting Hole ø mm (inch)	Max. Tie Width mm (inch)
TM-2S6	14.9 (0.59)	9.5 (0.37)	7.2 (0.28)	3.7 (0.15)	4.8 (0.19)
TM-2S8	14.9 (0.59)	9.5 (0.37)	7.2 (0.28)	4.5 (0.18)	4.8 (0.19)
TM-3S8	21.9 (0.86)	15.9 (0.63)	9.7 (0.38)	4.5 (0.18)	9.0 (0.35)
TM-3S10	21.9 (0.86)	15.9 (0.63)	9.7 (0.38)	5.0 (0.20)	9.0 (0.35)
TM-3S25	21.9 (0.86)	15.9 (0.63)	9.7 (0.38)	6.4 (0.25)	9.0 (0.35)

## KNOCK-IN LOW PROFILE MOUNTS


- The special 'diagonal' design of the fixing guarantees a secure installation at all times
- Once installed the mounts offer a firm fixing a wide variety of cable ties
- The two-piece 'wedge' ensures that once installed the mounts will not come away from the panel, ideal for use where a high pull out force is required
- Particularly designed for the areas with restricted access
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

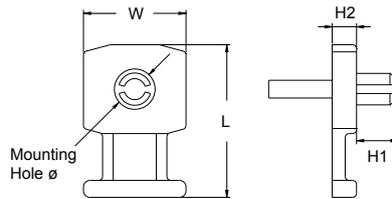

Part No.	L mm (inch)	W mm (inch)	H1 mm (inch)	H2 mm (inch)	Mounting Hole ø mm (inch)	Max. Tie Width mm (inch)
KM-K36	18.9 (0.74)	12.6 (0.50)	5.1 (0.20)	3.0 (0.12)	3.6 (0.14)	4.8 (0.19)
KM-K43	18.9 (0.74)	12.6 (0.50)	5.1 (0.20)	3.0 (0.12)	4.3 (0.17)	4.8 (0.19)
KM-K50	18.9 (0.74)	12.6 (0.50)	5.1 (0.20)	3.0 (0.12)	5.0 (0.20)	4.8 (0.19)

## SCREW APPLIED LOW PROFILE MOUNTS


- Installed "outside serrated" and take up no more space than the cable itself
- Particularly used in telecoms equipment, switch gear and control cabinets
- Particularly suitable for applications with minimal space
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

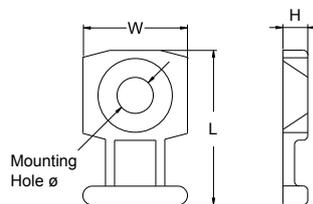

Part No.	L mm (inch)	W mm (inch)	H mm (inch)	Mounting Hole ø mm (inch)	Max. Tie Width mm (inch)
SM-5	10.2 (0.40)	8.1 (0.32)	2.5 (0.10)	3.5 (0.14)	2.5 (0.10)
SM-8	18.9 (0.74)	12.6 (0.50)	3.0 (0.12)	4.4 (0.17)	4.8 (0.19)

# CABLE CLAMPS

- Light weight design with strong fixing particularly suitable for use in areas of aircraft and aerospace
- Material: Polyamide 6,6, UL94V-2
- Color: Natural, black

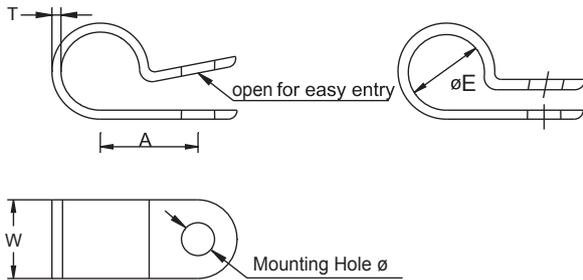


Part No.	Mounting Hole Centers (A) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø (E) mm (inch)	Mounting Hole ø mm (inch)
GCL-1/8S	8.2 (0.32)	9.1 (0.36)	1.3 (0.05)	3.3 (0.13)	5.5 (0.21)
GCL-3/16S	9.6 (0.38)	9.1 (0.36)	1.3 (0.05)	4.8 (0.19)	5.5 (0.21)
GCL-1/4S	10.3 (0.41)	9.1 (0.36)	1.3 (0.05)	6.6 (0.26)	5.5 (0.21)
GCL-5/16S	10.6 (0.42)	9.1 (0.36)	1.3 (0.05)	7.8 (0.31)	5.5 (0.21)
GCL-1/2S	23.8 (0.94)	9.4 (0.37)	1.3 (0.05)	12.7 (0.5)	5.4 (0.21)
GCL-5/16L	10.6 (0.42)	12.7 (0.50)	1.3 (0.05)	7.6 (0.30)	4.4 (0.17)
GCL-3/8S	11.9 (0.47)	9.2 (0.36)	1.3 (0.05)	9.7 (0.38)	5.5 (0.21)
GCL-1/8	9.1 (0.36)	12.7 (0.50)	1.5 (0.06)	2.9 (0.11)	5.4 (0.21)
GCL-1/4	11.4 (0.45)	12.7 (0.50)	1.5 (0.06)	5.9 (0.23)	5.3 (0.21)
GCL-3/8	13.4 (0.53)	12.1 (0.48)	1.5 (0.06)	9.1 (0.36)	5.3 (0.21)
GCL-1/2	15.0 (0.59)	12.7 (0.50)	1.5 (0.06)	12.2 (0.48)	5.3 (0.21)
GCL-9/16	15.8 (0.62)	12.7 (0.50)	1.5 (0.06)	13.8 (0.54)	5.3 (0.21)
GCL-5/8	27.2 (1.07)	12.4 (0.49)	1.3 (0.05)	15.5 (0.61)	5.3 (0.21)
GCL-3/4	19.8 (0.78)	12.7 (0.50)	1.5 (0.06)	18.6 (0.73)	5.3 (0.21)
GCL-7/8	21.4 (0.84)	12.7 (0.50)	1.5 (0.06)	21.8 (0.86)	5.3 (0.21)
GCL-1-1/8	24.6 (0.97)	12.7 (0.50)	1.5 (0.06)	27.9 (1.10)	5.3 (0.21)

## MOUNTING BASES



- Suitable for use in a wide range of materials including concrete, brick, block or wood
- The extended head allows the bundles to be located at a distance from the brickwork with the holders
- The holders, in conjunction with a cable tie, can be used either indoors or outdoors for a diverse range of applications from holding climbing plants, to securing cables running between buildings
- Material: Polyamide 6,6, UL94V-2
- Color: Black



TH-2, TH-3

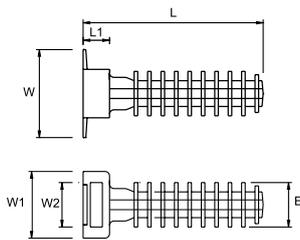


TH-2A, TH-3A

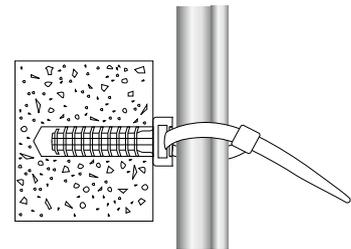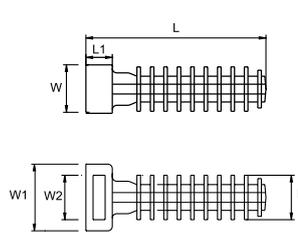

Part No.	L mm (inch)	L1 mm (inch)	W mm (inch)	W1 mm (inch)	W2 mm (inch)	E mm (inch)	Drill Hole $\phi$ mm (inch)	Max. Tie Width mm (inch)
TH-2	40.5 (1.59)	5.9 (0.23)	20.0 (0.79)	15.0 (0.59)	10.0 (0.39)	9.5 (0.37)	8.0 (0.31)	9.0 (0.35)
TH-2A	40.5 (1.59)	5.9 (0.23)	10.9 (0.43)	15.0 (0.59)	10.0 (0.39)	9.5 (0.37)	8.0 (0.31)	9.0 (0.35)
TH-3	37.5 (1.48)	5.9 (0.23)	20.0 (0.79)	15.0 (0.59)	10.0 (0.39)	8.0 (0.31)	7.0 (0.28)	9.0 (0.35)
TH-3A	37.5 (1.48)	5.9 (0.23)	10.9 (0.43)	15.0 (0.59)	10.0 (0.39)	8.0 (0.31)	7.0 (0.28)	9.0 (0.35)

## SELF ADHESIVE TWIST LOCKS


- Strong adhesion for quick and easy installation
- Reusable and releasable for easy wire bundling
- Easy open-and-twist fit to cables
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

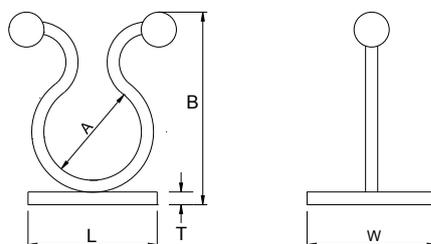

Part No.	L mm (inch)	W mm (inch)	T mm (inch)	A mm (inch)	B mm (inch)	Max. Bundle $\phi$ mm (inch)
HW-8Aa	17.0 (0.70)	20.0 (0.79)	2.0 (0.08)	8.6 (0.34)	24.1 (0.95)	7.6 (0.30)
HW-8Ab	20.0 (0.79)	20.0 (0.79)	2.0 (0.08)	16.0 (0.70)	32.0 (1.26)	15.0 (0.59)

## TWIST LOCKS

- Reusable and releasable for easy wire bundling
- Easy open-and-twist to cables
- Material: Polyamide 6,6, UL94V-2
- Color: Natural




Part No.	A mm (inch)	B mm (inch)	Max.Bundle $\phi$ mm (inch)
TH-E	5.2 (0.21)	21.0 (0.83)	4.5 (0.18)
TH-F	8.3 (0.33)	25.2 (0.99)	7.3 (0.29)
TH-G	11.5 (0.45)	30.9 (1.22)	10.5 (0.41)
TH-H	15.0 (0.59)	35.1 (1.38)	14.0 (0.55)

Part No.	A mm (inch)	B mm (inch)	Max.Bundle $\phi$ mm (inch)
TH-I	18.0 (0.71)	40.0 (1.58)	17.0 (0.70)
TH-J	19.5 (0.77)	42.5 (1.67)	19.0 (0.75)
TH-K	22.5 (0.89)	45.5 (1.79)	22.0 (0.87)

## TWIST LOCK WITH STANDOFF



- To separate wires from the board for avoiding hot components' interference
- Cable and wire bundles load and unload with a fingertip twist
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

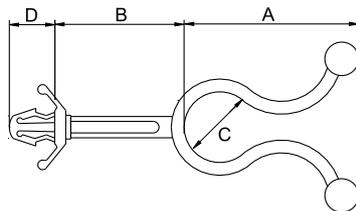

Part No.	A mm (inch)	B mm (inch)	C mm (inch)	D mm (inch)	Max.Bundle $\phi$ mm (inch)	Mounting Hole $\phi$ mm (inch)	Panel Thickness mm (inch)
TH-A	28.4 (1.12)	21.0 (0.83)	12.0 (0.47)	7.5 (0.30)	11.0 (0.43)	4.8 (0.19)	2.2 (0.09)
TH-B	19.4 (0.76)	33.5 (1.32)	6.0 (0.24)	7.5 (0.30)	5.0 (0.20)	4.8 (0.19)	2.2 (0.09)
TH-B1	19.0 (0.75)	6.0 (0.24)	6.0 (0.24)	7.5 (0.30)	5.0 (0.20)	4.8 (0.19)	2.2 (0.09)
TH-B2	19.4 (0.76)	33.5 (1.32)	5.5 (0.22)	7.5 (0.30)	4.5 (0.18)	4.8 (0.19)	2.2 (0.09)
TH-C	26.3 (1.04)	4.7 (0.19)	11.0 (0.43)	7.5 (0.30)	10.0 (0.39)	4.8 (0.19)	2.2 (0.09)

# WIRE PUSH IN CLIPS


- The shape of the wire saddle ensures that they can accept either single or multiple cables, whilst the design of the cable entry allows cables to be simply pushed into place
- The self-locking feature ensures that once inside the saddle the wires cannot be removed accidentally
- The arrowhead design of fixing ensures simple and secure installation and only needs access to the panel from one side
- With the increased complexity of electronic and electrical installations the use of the wire saddle enables cables to be installed using the minimum amount of space, a typical application would be in the frames/ rail of control cabinets
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

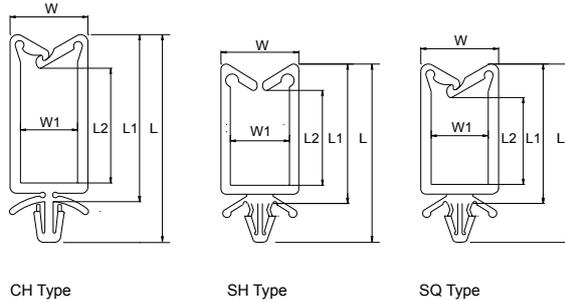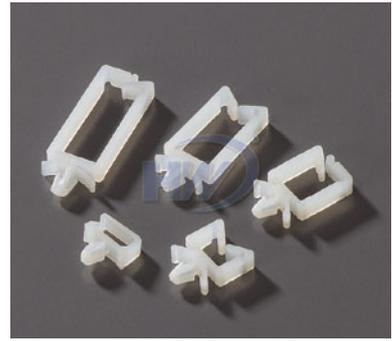

Part No.	L mm (inch)	L1 mm (inch)	L2 mm (inch)	W mm (inch)	W1 mm (inch)	Mounting Hole $\phi$ mm (inch)	Panel Thickness mm (inch)
CH-A	25.9 (1.02)	18.0 (0.71)	8.8 (0.35)	15.0 (0.59)	11.0 (0.43)	4.8 (0.19)	1.7 (0.07)
CH-B	34.9 (1.37)	27.0 (1.06)	17.5 (0.69)	15.0 (0.59)	11.0 (0.43)	4.8 (0.19)	1.7 (0.07)
CH-C	42.9 (1.69)	35.0 (1.38)	26.0 (1.02)	15.0 (0.59)	11.0 (0.43)	4.8 (0.19)	1.7 (0.07)
SH-A	21.8 (0.86)	13.2 (0.52)	4.8 (0.19)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SH-B	27.0 (1.06)	18.4 (0.72)	9.8 (0.39)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SH-C	35.8 (1.41)	27.2 (1.07)	19.0 (0.75)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SH-D	43.8 (1.72)	35.2 (1.39)	26.9 (1.06)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SQ-A	20.7 (0.81)	13.1 (0.52)	4.8 (0.19)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)
SQ-B	25.7 (1.01)	18.1 (0.71)	10.0 (0.39)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)
SQ-C	34.7 (1.37)	27.1 (1.07)	19.0 (0.75)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)
SQ-D	42.9 (1.69)	35.3 (1.39)	27.0 (1.06)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)

# WIRE SADDLES


- The shape of the wire saddle ensures that they can accept either single or multiple cables, whilst the design of the cable entry allows cables to be simply pushed into place
- The self-locking feature ensures that once inside the saddle the wires cannot be removed accidentally
- The arrowhead design of fixing ensures simple and secure installation and only needs access to the panel from one side
- With the increased complexity of electronic and electrical installations, the use of the wire saddle enables cables to be installed using the minimum amount of space, a typical application would be in the frames/ rail of control cabinets
- Material: Polyamide 6,6, UL94V-2
- Color: Natural



Part No.	L mm (inch)	L1 mm (inch)	L2 mm (inch)	W mm (inch)	W1 mm (inch)	Mounting Hole $\phi$ mm (inch)	Panel Thickness mm (inch)
WH-A	15.0 (0.59)	8.2 (0.32)	4.8 (0.19)	14.2 (0.60)	10.0 (0.39)	4.8 (0.19)	1.6 (0.06)

# CABLE CLIPS


- Fixable, good elasticity, to bear collision, unable broken
- Inserted nail, nail stick to plastic seat, save time and cost down
- Material: Polyethylene (plastic body), carbon steel (nail)
- Color: Mostly grey and white, other colors are also available

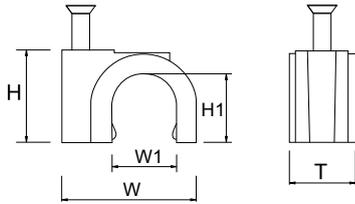

Part No.	W mm (inch)	W1 mm (inch)	H mm (inch)	H1 mm (inch)	T mm (inch)	Nails mm (inch)
GC-0.35	8.6 (0.34)	3.5 (0.14)	5.9 (0.23)	3.7 (0.15)	5.0 (0.20)	ø2.0x15 (0.08x0.60)
GC-0.4	10.0 (0.39)	4.0 (0.16)	6.6 (0.26)	4.2 (0.17)	5.2 (0.20)	ø2.5x18 (0.10x0.71)
GC-0.5	12.0 (0.47)	5.0 (0.20)	7.6 (0.30)	5.3 (0.21)	6.3 (0.25)	ø2.5x18 (0.10x0.71)
GC-1	12.4 (0.49)	6.0 (0.24)	9.0 (0.35)	6.6 (0.26)	6.3 (0.25)	ø2.5x20 (0.10x0.79)
GC-1.5	14.3 (0.56)	7.0 (0.28)	11.0 (0.43)	7.2 (0.28)	6.3 (0.25)	ø2.5x22 (0.10x0.87)
GC-2	14.8 (0.58)	8.0 (0.31)	11.5 (0.45)	8.6 (0.34)	6.8 (0.27)	ø2.5x22 (0.10x0.87)
GC-2.5	17.6 (0.69)	9.0 (0.35)	12.0 (0.47)	9.0 (0.35)	7.0 (0.28)	ø2.5x25 (0.10x0.99)
GC-3	17.9 (0.70)	10.0 (0.39)	13.4 (0.53)	10.5 (0.41)	7.0 (0.28)	ø2.5x27 (0.10x1.07)
GC-3.5	18.7 (0.74)	11.0 (0.43)	16.6 (0.65)	12.2 (0.48)	9.0 (0.35)	ø2.5x27 (0.10x1.07)
GC-4	20.0 (0.79)	12.0 (0.47)	16.0 (0.63)	12.5 (0.49)	9.0 (0.35)	ø2.5x27 (0.10x1.07)
GC-6	22.0 (0.87)	14.0 (0.55)	20.5 (0.81)	15.6 (0.61)	9.0 (0.35)	ø3.0x35 (0.12x1.38)
GC-7	25.0 (0.98)	16.0 (0.63)	21.7 (0.85)	17.0 (0.67)	11.8 (0.46)	ø3.2x38 (0.13x1.50)
GC-7S	25.0 (0.98)	16.0 (0.63)	21.7 (0.85)	17.0 (0.67)	11.8 (0.46)	ø2.5x38 (0.10x1.50)
GC-7.2	27.8 (1.09)	18.0 (0.71)	22.0 (0.87)	17.5 (0.69)	10.6 (0.42)	ø3.2x38 (0.13x1.50)
GC-7.5	29.0 (1.14)	20.0 (0.79)	23.5 (0.93)	18.5 (0.73)	10.4 (0.41)	ø3.2x38 (0.13x1.50)
GC-7.5S	29.0 (1.14)	20.0 (0.79)	23.5 (0.93)	18.5 (0.73)	10.4 (0.41)	ø2.5x38 (0.10x1.50)
GC-8	32.7 (1.29)	22.0 (0.87)	27.8 (1.09)	22.5 (0.89)	11.0 (0.43)	ø3.2x42 (0.13x1.66)
GC-9	39.0 (1.54)	25.0 (0.98)	31.6 (1.24)	26.0 (1.02)	13.0 (0.51)	ø3.2x47 (0.13x1.86)
GC-10	45.5 (1.79)	32.0 (1.26)	40.0 (1.57)	33.5 (1.32)	13.7 (0.54)	ø3.6x56 (0.15x2.21)
GCR-3.5	8.5 (0.33)	3.5 (0.14)	5.0 (0.20)	3.2 (0.13)	5.1 (0.20)	ø1.5x18 (0.06x0.71)
GCR-6	12.0 (0.47)	5.5 (0.22)	7.5 (0.30)	5.5 (0.22)	6.0 (0.24)	ø2.0x24 (0.08x0.95)
GCR-7	13.3 (0.52)	7.0 (0.28)	8.5 (0.33)	6.5 (0.26)	6.8 (0.27)	ø2.0x24 (0.08x0.95)
GCR-8	15.0 (0.59)	7.0 (0.28)	10.0 (0.39)	7.5 (0.30)	8.0 (0.31)	ø2.0x24 (0.08x0.95)

## CONTRACT FINISH CABLE CLIPS


- Fixable, good elasticity, to bear collision, unable broken
- Inserted nail, nail stick to plastic seat, save time and cost down
- Material: Polyethylene (plastic body), carbon steel (nail)
- Color: Mostly white, other colors are also available

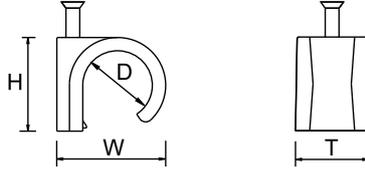

Part No.	W mm (inch)	T mm (inch)	H mm (inch)	D mm (inch)	Nails mm (inch)
GB-1	8.4 (0.33)	7.0 (0.28)	4.8 (0.19)	3.0 (0.12)	ø1.5x21 (0.06x0.83)
GB-2	10.0 (0.39)	6.0 (0.24)	7.0 (0.28)	4.6 (0.18)	ø1.8x26 (0.08x1.03)
GB-3	12.0 (0.47)	8.8 (0.35)	9.2 (0.36)	7.0 (0.28)	ø1.8x26 (0.08x1.03)
GB-4	14.8 (0.58)	9.6 (0.38)	12.5 (0.49)	9.5 (0.37)	ø1.8x26 (0.08x1.03)
GB-5	20.0 (0.79)	11.8 (0.46)	17.0 (0.67)	14.8 (0.58)	ø2.5x40 (0.10x1.58)

## FLAT CABLE CLIPS



- Fixable, good elasticity, to bear impact, unable broken
- Inserted nail, nail stick to plastic seat, save time and cost down
- Material: Polyethylene (plastic body), carbon steel (nail)
- Color: Mostly white, other colors are also available

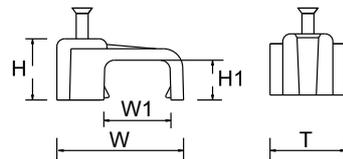

Part No.	W mm (inch)	W1 mm (inch)	H mm (inch)	H1 mm (inch)	T mm (inch)	Nails mm (inch)
GF-0.7	12.0 (0.47)	5.5 (0.22)	5.4 (0.21)	3.1 (0.12)	7.0 (0.28)	ø2.0x15 (0.08x0.60)
GF-1.2	13.0 (0.51)	6.2 (0.24)	5.4 (0.21)	3.8 (0.15)	7.4 (0.29)	ø2.0x15 (0.08x0.60)
GF-1.6	14.5 (0.57)	8.0 (0.31)	8.0 (0.31)	5.0 (0.20)	9.3 (0.37)	ø2.0x15 (0.08x0.60)
GF-2.0	16.0 (0.63)	8.5 (0.33)	8.0 (0.31)	5.0 (0.20)	9.9 (0.39)	ø2.5x18 (0.10x0.71)
GF-2.2	17.2 (0.68)	10.0 (0.39)	10.0 (0.39)	6.5 (0.26)	9.9 (0.39)	ø2.5x22 (0.10x0.87)
GFC-PT	10.1 (0.40)	5.0 (0.20)	3.6 (0.14)	1.8 (0.07)	5.4 (0.21)	ø1.5x15 (0.06x0.60)
GFC-0.75	10.8 (0.43)	6.0 (0.24)	6.2 (0.24)	4.1 (0.16)	6.2 (0.24)	ø1.5x18 (0.06x0.71)
GFC-1.0	15.8 (0.62)	8.0 (0.31)	7.5 (0.30)	4.3 (0.17)	9.4 (0.37)	ø2.0x24 (0.08x0.95)
GFC-1.5	16.5 (0.65)	9.0 (0.35)	7.8 (0.31)	5.0 (0.20)	9.5 (0.37)	ø2.0x24 (0.08x0.95)
GFC-2.0	19.3 (0.76)	11.3 (0.44)	8.0 (0.31)	5.0 (0.20)	10.6 (0.42)	ø2.0x24 (0.08x0.95)
GFC-2.5	17.0 (0.67)	10.0 (0.39)	8.3 (0.33)	5.3 (0.21)	10.5 (0.41)	ø2.0x24 (0.08x0.95)
GFC-4.0	19.6 (0.77)	11.4 (0.45)	9.6 (0.38)	6.5 (0.26)	10.5 (0.41)	ø2.0x24 (0.08x0.95)
GFC-6.0	21.0 (0.83)	13.5 (0.53)	10.5 (0.41)	7.2 (0.28)	10.5 (0.41)	ø2.0x29 (0.08x1.15)
GFC-10	24.3 (0.96)	17.2 (0.68)	11.6 (0.46)	8.6 (0.34)	10.3 (0.41)	ø2.0x29 (0.08x1.15)
GFC-16	28.0 (1.10)	20.1 (0.79)	13.4 (0.53)	10.2 (0.40)	12.0 (0.47)	ø2.5x34 (0.10x1.34)

## DUAL NAILS FLAT CABLE CLIPS


- Fixable, good elasticity, to bear collision, unable broken
- Inserted nail, nail stick to plastic seat, save time and cost down
- Dual nail could strengthen adhesion
- Suitable for fastening big flat wires
- Material: Polyethylene (plastic body), carbon steel (nail)
- Color: Mostly white, other colors are also available

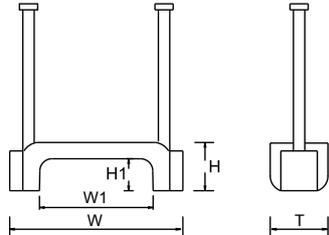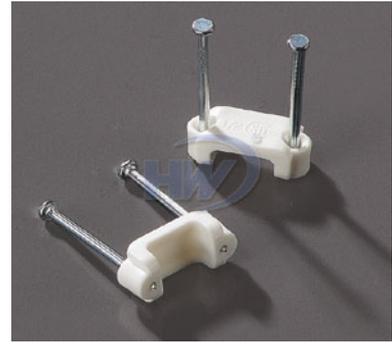

Part No.	W mm (inch)	W1 mm (inch)	H mm (inch)	H1 mm (inch)	T mm (inch)	Nails mm (inch)
GNF-13H	23.4 (0.92)	13.8 (0.54)	9.4 (0.37)	6.8 (0.27)	9.4 (0.37)	ø1.8x31 (0.07x1.23)
GNF-19H	29.8 (1.17)	19.5 (0.77)	9.4 (0.37)	6.8 (0.27)	9.5 (0.37)	ø1.8x31 (0.07x1.23)

## DUAL NAILS CABLE CLIPS

- Fixable, good elasticity, to bear impact, unable broken
- Inserted nail, nail stick to plastic seat, save time and cost down
- Dual nail could strengthen adhesion
- Suitable for fasten large PVC pipe or cables
- Material: Polyethylene (plastic body), carbon steel (nail)
- Color: Mostly grey, other colors are also available

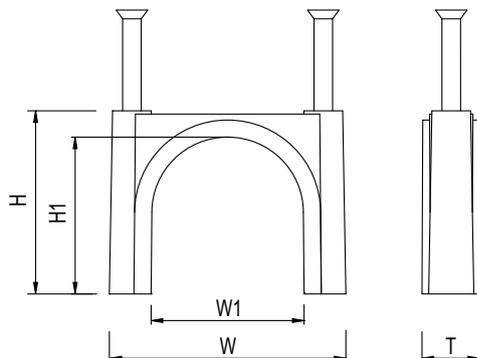

Part No.	W mm (inch)	W1 mm (inch)	H mm (inch)	H1 mm (inch)	T mm (inch)	Nails mm (inch)
GNC-11	60.3 (2.37)	40.0 (1.57)	50.4 (1.98)	41.7 (1.64)	13.0 (0.51)	ø4.0x68 (0.16x2.68)
GNC-12	74.7 (2.94)	49.0 (1.93)	57.7 (2.27)	51.5 (2.03)	15.5 (0.61)	ø4.0x78 (0.16x3.08)
GNC-14	83.7 (3.30)	62.0 (2.44)	71.8 (2.83)	62.4 (2.46)	17.2 (0.68)	ø4.5x97 (0.18x3.82)