
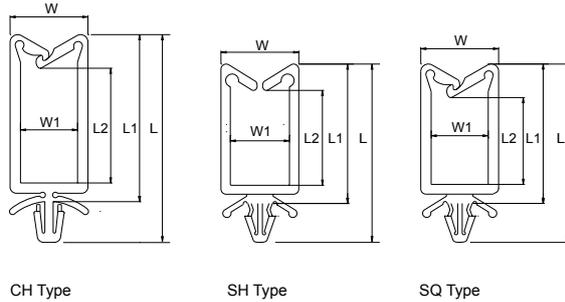


WIRE PUSH IN CLIPS


- The shape of the wire saddle ensures that they can accept either single or multiple cables, whilst the design of the cable entry allows cables to be simply pushed into place
- The self-locking feature ensures that once inside the saddle the wires cannot be removed accidentally
- The arrowhead design of fixing ensures simple and secure installation and only needs access to the panel from one side
- With the increased complexity of electronic and electrical installations the use of the wire saddle enables cables to be installed using the minimum amount of space, a typical application would be in the frames/ rail of control cabinets
- Material: Polyamide 6,6, UL94V-2
- Color: Natural

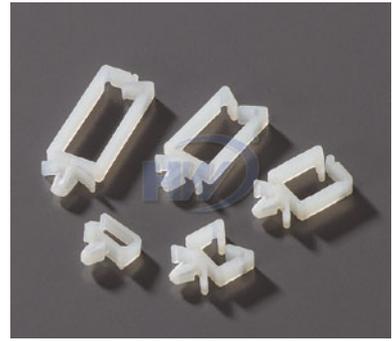

Part No.	L mm (inch)	L1 mm (inch)	L2 mm (inch)	W mm (inch)	W1 mm (inch)	Mounting Hole ϕ mm (inch)	Panel Thickness mm (inch)
CH-A	25.9 (1.02)	18.0 (0.71)	8.8 (0.35)	15.0 (0.59)	11.0 (0.43)	4.8 (0.19)	1.7 (0.07)
CH-B	34.9 (1.37)	27.0 (1.06)	17.5 (0.69)	15.0 (0.59)	11.0 (0.43)	4.8 (0.19)	1.7 (0.07)
CH-C	42.9 (1.69)	35.0 (1.38)	26.0 (1.02)	15.0 (0.59)	11.0 (0.43)	4.8 (0.19)	1.7 (0.07)
SH-A	21.8 (0.86)	13.2 (0.52)	4.8 (0.19)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SH-B	27.0 (1.06)	18.4 (0.72)	9.8 (0.39)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SH-C	35.8 (1.41)	27.2 (1.07)	19.0 (0.75)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SH-D	43.8 (1.72)	35.2 (1.39)	26.9 (1.06)	15.0 (0.59)	11.4 (0.45)	4.8 (0.19)	2.2 (0.09)
SQ-A	20.7 (0.81)	13.1 (0.52)	4.8 (0.19)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)
SQ-B	25.7 (1.01)	18.1 (0.71)	10.0 (0.39)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)
SQ-C	34.7 (1.37)	27.1 (1.07)	19.0 (0.75)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)
SQ-D	42.9 (1.69)	35.3 (1.39)	27.0 (1.06)	15.0 (0.59)	11.2 (0.44)	4.8 (0.19)	2.0 (0.08)

WIRE SADDLES

- The shape of the wire saddle ensures that they can accept either single or multiple cables, whilst the design of the cable entry allows cables to be simply pushed into place
- The self-locking feature ensures that once inside the saddle the wires cannot be removed accidentally
- The arrowhead design of fixing ensures simple and secure installation and only needs access to the panel from one side
- With the increased complexity of electronic and electrical installations, the use of the wire saddle enables cables to be installed using the minimum amount of space, a typical application would be in the frames/ rail of control cabinets
- Material: Polyamide 6,6, UL94V-2
- Color: Natural



Part No.	L mm (inch)	L1 mm (inch)	L2 mm (inch)	W mm (inch)	W1 mm (inch)	Mounting Hole ϕ mm (inch)	Panel Thickness mm (inch)
WH-A	15.0 (0.59)	8.2 (0.32)	4.8 (0.19)	14.2 (0.60)	10.0 (0.39)	4.8 (0.19)	1.6 (0.06)