


TEFZEL® CABLE TIES



80 ~ 445 N
8.2~45.4 Kgf / 18~100 lbf

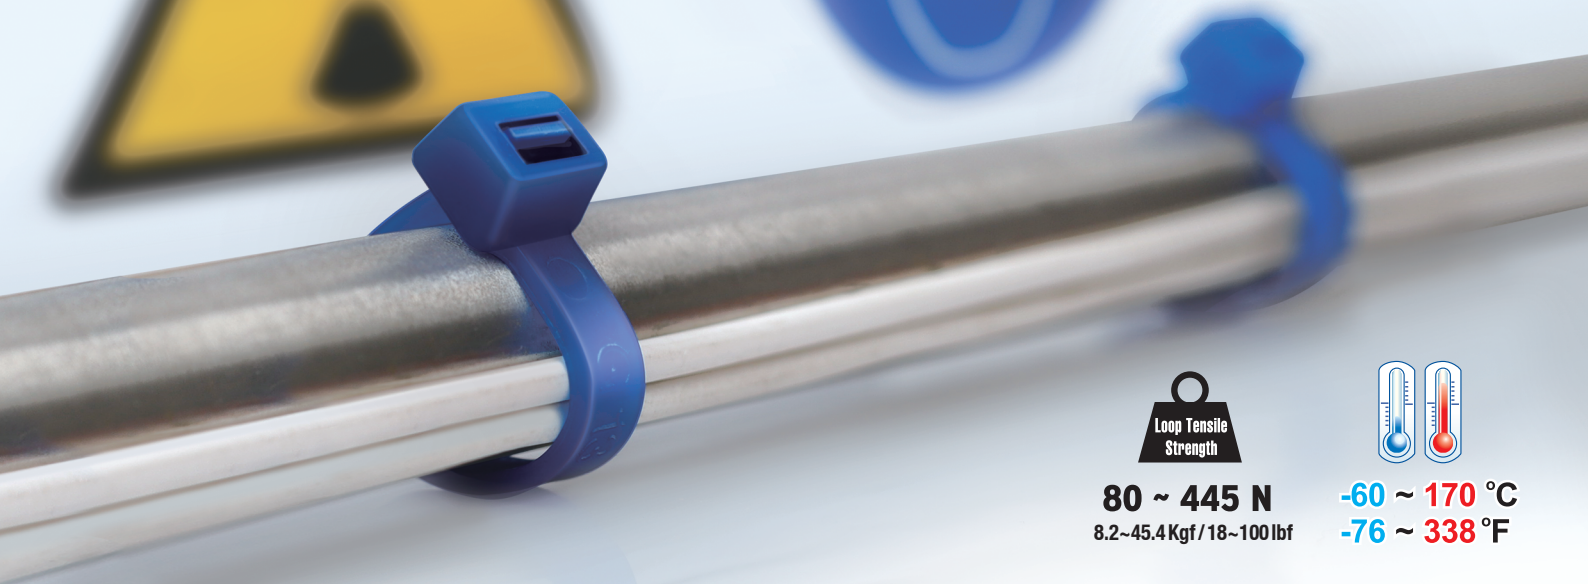

-60 ~ 170 °C
-76 ~ 338 °F

Reliable & High Performance

Tefzel® can perform successfully in applications where other materials are lacking in mechanical toughness, broad thermal capability, ability to meet severe environmental conditions.



Gamma Radiation Resistant



Chemical Attack Resistant



Ultraviolet Radiation Resistant






More information for
Tefzel Cable Ties



TEFZEL® CABLE TIES

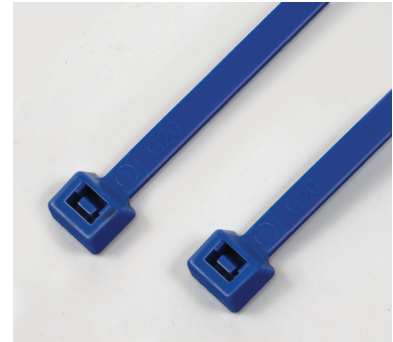- Tefzel® cable ties are specialized cable ties recommended for applications requiring high resistance to environmental stresses such as chemical attack, gamma radiation, ultraviolet radiation, and extreme temperatures.
- Ideal for use in nuclear power facilities and chemical processing plants
- Standard color of Tefzel® cable tie is blue
- Material: Tefzel®
- Color: Blue



Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength			Recommended Tensioning Tools
				N	kgf	lbf	
GT-100M-TF	102 (4.02)	2.4 (0.09)	22 (0.87)	80	8.2	18	 GIT-703
GT-150I-TF	150 (5.91)	3.6 (0.14)	35 (1.38)	178	18.2	40	
GT-200I-TF	200 (7.87)	3.6 (0.14)	53 (2.09)	178	18.2	40	
GT-190ST-TF	190 (7.48)	4.6 (0.18)	46 (1.81)	222	22.6	50	
GT-200ST-TF	200 (7.87)	4.6 (0.18)	50 (1.97)	222	22.6	50	
GT-300ST-TF	300 (11.81)	4.8 (0.19)	76 (2.99)	222	22.6	50	
GT-370ST-TF	370 (14.57)	4.6 (0.18)	102 (4.02)	222	22.6	50	
GT-300HD-TF	300 (11.81)	7.3 (0.29)	76 (2.99)	445	45.4	100	 GIT-704G
GT-370HD-TF	370 (14.57)	7.4 (0.29)	102 (4.02)	445	45.4	100	
GT-430HD-TF	435 (17.13)	8.8 (0.35)	122 (4.80)	445	45.4	100	

*Tefzel® is a registered trademark of E.T. du Pont de Nemours and Company

HUA WEI INDUSTRIAL CO., LTD.

No.1, Gongyequ 26th Rd., Nantun Dist., Taichung City 408, Taiwan, R.O.C.
 TEL: +886-4-23597777 FAX: +886-4-23596705-6
 Email:service@hwlok.com http://www.hwlok.com

