



Waterproof




Anti-corrosion



Easy to Use

Waterproof Wire Connectors

- Tough thermoplastic, UL 94V-2 flame-retardant shell for 105°C (221°F).
- Rated to 600V max.
- Screw-on wire connectors pre-filled with dielectric silicone sealant. Comply with UL standard.
- Waterproof, dustproof and corrosion proof.
- For use in dry, damp, wet, bury locations. Not for use in continual submersion applications. One time use only. Do not Reuse Connector.
- Easy to use wire connectors nuts.
- Material: Shell - Polypropylene (PP). Spring - calvanized carbon steel. Fillers - dielectric silicone sealant.



Landscape Lighting



Irrigation System



Habor Electrical Outlets



Part No.	Temp Rating	Dimension mm(inch)			Voltage	Suitable Wire AWG	Color
		A	B	C			
R3-R	105°C (221 °F)	40.9 (1.61)	16.5 (0.65)	25.2 (0.99)	600V	20 - 10	Blue/Red
R6-R	105°C (221 °F)	47.2 (1.86)	16.5 (0.65)	26.5 (1.04)	600V	20 - 8	Blue/Black


Easy to Use




① Strip the wire with the lead for 13 ~ 16mm (0.51 ~ 0.63 inch).



② Insert the spliced wire until the wire touches the bottom of the wire connector.



③ Turn clockwise until the wire is very tight with at least 2 twists visible

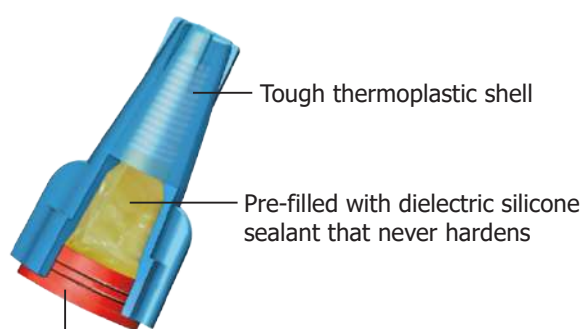

Fixed end cap secures sealant and protects connection

HUA WEI INDUSTRIAL CO., LTD.

No.1, Gongyequ 26th Rd., Nantun Dist., Taichung City 408, Taiwan
 TEL: +886-4-23597777 FAX: +886-4-23596705~6
 Email: service@hwlok.com http://www.hwlok.com



www.hwlok.com