


ROUND HEAD TIES

- Available in a wide range of materials
- Internal serrations allowing for a positive hold onto cable and pipe bundles
- The design of the head guarantees a high tensile strength while allowing a very low insertion force
- Material: Polyamide 6,6, UL94V-2
- Color: All colors are available

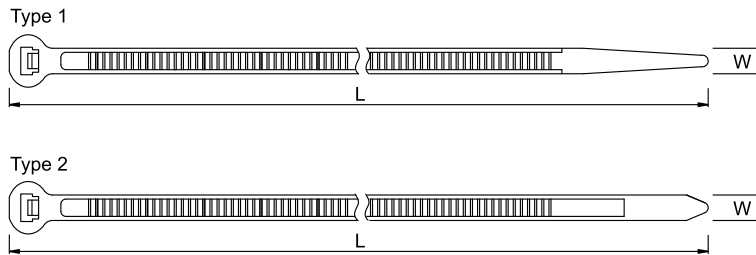

Part No.	Type	Length (L) mm (inch)	Width (W) mm (inch)	Max.Bundle ϕ mm (inch)	Min. Loop Tensile Strength		
					N	kgf	lbf
GTE-100M	1	100 (3.94)	2.5 (0.10)	22 (0.87)	97	9.9	22
GTE-160M	1	160 (6.30)	2.5 (0.10)	40 (1.57)	97	9.9	22
GTE-200M	1	200 (7.87)	2.5 (0.10)	53 (2.09)	97	9.9	22
GTE-140I	1	140 (5.51)	3.6 (0.14)	33 (1.30)	213	21.7	48
GTE-200I	1	200 (7.87)	3.6 (0.14)	53 (2.09)	213	21.7	48
GTE-300I	1	300 (11.81)	3.6 (0.14)	76 (2.99)	213	21.7	48
GTE-370I	1	370 (14.57)	3.6 (0.14)	102 (4.02)	213	21.7	48
GTE-120ST	1	120 (4.72)	4.8 (0.19)	24 (0.94)	254	25.9	57
GTE-160ST	1	160 (6.30)	4.8 (0.19)	38 (1.50)	254	25.9	57
GTE-190ST	1	188 (7.40)	4.8 (0.19)	46 (1.81)	254	25.9	57
GTE-280ST	1	280 (11.02)	4.8 (0.19)	70 (2.76)	254	25.9	57
GTE-300ST	1	300 (11.81)	4.8 (0.19)	76 (2.99)	254	25.9	57
GTE-370ST	1	370 (14.57)	4.8 (0.19)	102 (4.02)	254	25.9	57
GTE-200HD	2	200 (7.87)	7.6 (0.30)	50 (1.97)	636	64.9	143
GTE-250HD	2	250 (9.84)	7.6 (0.30)	65 (2.56)	636	64.9	143
GTE-300HD	2	300 (11.81)	7.6 (0.30)	76 (2.99)	636	64.9	143
GTE-370HD	2	370 (16.93)	7.6 (0.30)	102 (4.02)	636	64.9	143
GTE-430HD	2	430 (16.93)	7.6 (0.30)	110 (4.33)	636	64.9	143
GTE-450HD	2	450 (17.72)	7.6 (0.30)	132 (5.20)	636	64.9	143
GTE-530HD	2	530 (20.87)	7.6 (0.30)	140 (5.51)	636	64.9	143