
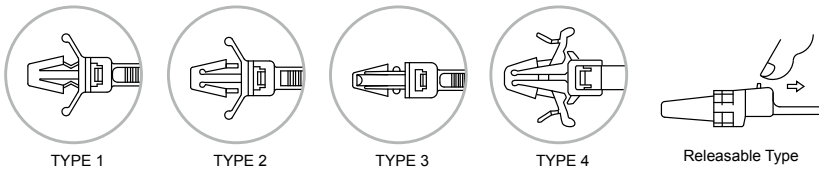



# PUSH MOUNT TIES

- The wing design of the mount helps stabilize the tie in high vibration applications
- These ties are ideal for fixing bundles along a wide range of surfaces materials such as sheet metal, wood, or cast iron
- One-piece, all plastic ties for quick, simple cable mounting
- Applying by first drilling a hole on panel or board with appropriate hole diameter and board thickness. Insert the mount head to the hole for fixture
- Material: Polyamide 6,6, UL94V-2
- Color: All colors are available

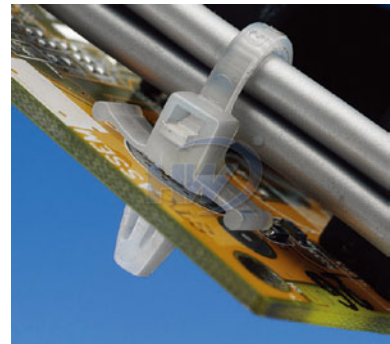

Part No.	Type	Length (L) mm (inch)	Width (W) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength			Mounting Hole ø mm (inch)	Panel Thickness mm (inch)
					N	kgf	lbf		
GTP-110M	1	110 (4.33)	2.5 (0.10)	22 (0.87)	80	8.2	18	4.8 (0.19)	~2.4 (0.09)
GTP-130M	1	130 (5.12)	2.5 (0.10)	28 (1.10)	80	8.2	18	4.8 (0.19)	~2.4 (0.09)
GTP-130I	1	130 (5.12)	3.2 (0.13)	28 (1.10)	133	13.6	30	4.0 (0.16)	~2.0 (0.08)
GTP-110ST	1	110 (4.33)	4.8 (0.19)	22 (0.87)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTP-130ST	1	130 (5.12)	4.8 (0.19)	25 (0.98)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTP-190ST	1	200 (7.87)	4.8 (0.19)	45 (1.77)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTP-110MA	2	110 (4.33)	2.5 (0.10)	22 (0.87)	80	8.2	18	4.8 (0.19)	~2.4 (0.09)
GTP-130MA	2	130 (5.12)	2.5 (0.10)	28 (1.10)	80	8.2	18	4.8 (0.19)	~2.4 (0.09)
GTP-130IA	2	130 (5.12)	3.2 (0.13)	28 (1.10)	133	13.6	30	4.0 (0.16)	~2.0 (0.08)
GTPS-100ST	2	100 (3.94)	4.8 (0.19)	18 (0.71)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTPS-190ST	2	190 (7.48)	4.8 (0.19)	45 (1.77)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTP-150I	3	150 (5.91)	3.6 (0.14)	32 (1.26)	133	13.6	30	5.2 (0.21)	~2.8 (0.11)
GTP-200ST	3	202 (7.91)	4.8 (0.19)	46 (1.81)	222	22.6	50	6.4 (0.25)	~3.6 (0.14)
<b>Releasable</b>									
GTRP-130I	1	130 (5.12)	3.2 (0.13)	28 (1.10)	133	13.6	30	4.0 (0.16)	~2.0 (0.08)
GTRP-110ST	1	110 (4.33)	4.8 (0.19)	17 (0.67)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTRP-130ST	1	130 (5.12)	4.8 (0.19)	25 (0.98)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTRP-190ST	1	200 (7.78)	4.8 (0.19)	45 (1.77)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTRP-170ST	2	170 (6.73)	4.8 (0.19)	38 (1.50)	222	22.6	50	6.4 (0.25)	~3.2 (0.13)
GTRP-200ST	3	200 (7.78)	4.8 (0.19)	46 (1.81)	222	22.6	50	6.4 (0.25)	~3.6 (0.14)
GTRP-100I	4	100 (3.94)	3.5 (0.14)	22 (0.87)	133	13.6	30	4.0 (0.16)	~2.0 (0.08)