

STAINLESS STEEL CABLE TIES - BALL-LOCK PVC COATED TIES

Ball lock type stainless steel cable ties of unique self-locking mechanism allows quick and reliable application with low insertion force required. Both of coated and uncoated products are available; Coated products provide excellent insulation and protection for cables and pipes. Uncoated tie is ideal for being applied for extreme environment temperature applications.

Product Feature:


- Metallic buckle helps to distinguish from black nylon tie.
- PVC coating is thicker and softer.
- Prevents corrosion between dissimilar metals.
- Provide additional edge protection.

Applications:

Ideal for petrochemical, industries, power stations, mining, ship-building, offshore, and other aggressive environments.

Technical Information:

- Material: Stainless Steel Grade 304 or 316
304 grade stainless steel, for standard applications
316 grade stainless steel, for extra corrosive environments
- Coating: PVC
- Working Temp.: -40°C to 85°C
- Description: Black Band with Metallic Buckle
- Flammability: Fireproof
- Other Properties: UV-resistant is available

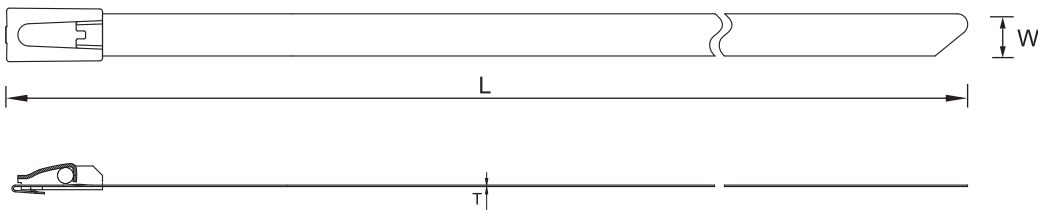

Part No.	Length (L) mm (inch)	Width (W) mm (inch)	Thickness (T) mm (inch)	Max.Bundle ø mm (inch)	Min. Loop Tensile Strength		
					N	kgf	lbf
MLG-150STV	150 (5.9)	5.6 (0.22)	1 (0.039)	37 (1.46)	350	35.7	80
MLG-200STV	200 (7.9)	5.6 (0.22)	1 (0.039)	50 (1.97)	350	35.7	80
MLG-250STV	250 (9.8)	5.6 (0.22)	1 (0.039)	63 (2.48)	350	35.7	80
MLG-350STV	350 (13.8)	5.6 (0.22)	1 (0.039)	89 (3.50)	350	35.7	80
MLG-450STV	450 (17.7)	5.6 (0.22)	1 (0.039)	115 (4.53)	350	35.7	80
MLG-600STV	600 (23.6)	5.6 (0.22)	1 (0.039)	154 (6.06)	350	35.7	80
MLG-750STV	750 (29.5)	5.6 (0.22)	1 (0.039)	178 (7.01)	350	35.7	80
MLG-900STV	900 (35.4)	5.6 (0.22)	1 (0.039)	229 (9.02)	350	35.7	80
MLG-200HDV	200 (7.8)	9.0 (0.35)	1 (0.039)	52 (2.05)	445	45.9	100
MLG-250HDV	250 (11.8)	9.0 (0.35)	1 (0.039)	65 (2.56)	445	45.9	100
MLG-300HDV	300 (14.5)	9.0 (0.35)	1 (0.039)	78 (3.07)	445	45.9	100
MLG-400HDV	400 (17.7)	9.0 (0.35)	1 (0.039)	102 (4.02)	445	45.9	100
MLG-500HDV	500 (19.7)	9.0 (0.35)	1 (0.039)	128 (5.04)	445	45.9	100
MLG-650HDV	650 (26.8)	9.0 (0.35)	1 (0.039)	165 (6.50)	445	45.9	100
MLG-800HDV	800 (31.5)	9.0 (0.35)	1 (0.039)	204 (8.03)	445	45.9	100
MLG-1000HDV	1000 (33.1)	9.0 (0.35)	1 (0.039)	254 (10.00)	445	45.9	100